

Dr. Peter Beilenson, M.D., M.P.H., Health Officer

DEMOLITION REQUEST FORM

(Please fill in all blanks)

Information of Property to be Demolished:

Elm Street Developement
Current Owner's Name

5916 Florey Road
Property Address
Hanover MD 21076

Subdivision (if applicable)

Lot #

All Prior Owners' Names (if requested or known)

Tax Map

Parcel #

Tax ID #

turn site clean & green
Purpose/Reason for Demolition

Future plans of property after demo (i.e. subdivision, parking lot, re-build new house, etc...)

If a subdivision, SDP#

Has the structure(s) been deemed unsafe by DILP YES NO

UTILITY RECORDS:

Property currently connected to public water YES NO

Property currently connected to public sewer YES NO

Does the property currently have any wells and/or septic systems YES NO

→ Explain: Well was abandoned by Barlow Well Drilling 7-28-2017
Septic was empty & Abandoned 7-26-2017 Pictures were E-Mailed

*Note: Any wells and/or septic systems that are to remain may require an approved percolation certification plan under Howard County Code Sec. 3.805

*Note: Any septic systems that are to be abandoned must be done by a septic contractor with documentation of the process.

*Note: All abandoned wells are to be sealed by a well driller licensed by the Maryland State Board of Well Drillers COMAR Sec 26.04.04.11 Abandonment Standards D (3)

COMMENTS: Property AKA 5910 Shady Lane & 5995 Shady Lane

Mark J Stawinski
Applicant's Name (please print)

410 215 1444
Applicant's Phone #

grizeconstruction@icloud.com
Applicant's Email

Applicant's Fax #


Applicant's Signature

7-28-2017
Date





Bureau of Environmental Health

8930 Stanford Blvd, Columbia MD 21045
Main: 410-313-2640 | Fax: 410-313-2648
TDD 410-313-2323 | Toll Free 1-866-313-6300
www.hchealth.org
Facebook: www.facebook.com/hocohealth
Twitter: HowardCoHealthDep

Maura J. Rossman, M.D., Health Officer

MEMORANDUM

Sent via email to grizconstruction@icloud.com

TO: Mark J Slowinski

FROM: Joseph C. Cabahug
Environmental Health Specialist
Well & Septic Program
Bureau of Environmental Health

Approved
08/15/2017
JD

DATE: August 15th, MMXVII

RE: 5910 Florey Road
Hanover, MD 21076
M. 0038, G.0009 P. 0340 and M. 0038, G. 0009, P. 0756
(Demolition of existing structures, clean. Possible redevelopment)

Property also known as:
5910 Shady Lane
5995 Shady Lane

This is to advise that the Howard County Health Department recommends issuance of the demolition permit for the above referenced property.

We were unable to locate any records of the subject property concerning any well and/or septic components.

The existing six inch drilled, domestic well of steel casing that extended 120 feet into the ground was abandoned and sealed using 30 bags of Geo Advantage Well Grout™ pre-blended grout by Michael Barlow Well Drilling.

Fogle's Septic Clean, Inc. was contracted to pump the existing septic tank. The existing septic tank was collapsed and filled with clean fill per current abandonment regulations.

IF ANY WELL OR SEPTIC COMPONENTS ARE FOUND DURING SITE WORK, YOU MUST NOTIFY THIS OFFICE IMMEDIATELY!!

Cc: file
JCC

 WATER WELL ABANDONMENT-SEALING REPORT FORM

SUBMIT COPIES OF COMPLETED FORM TO:

- * COUNTY ENVIRONMENTAL AGENCY (contact MDE, WMA if address needed)
- * WELL OWNER
- * MDE, WATER MANAGEMENT ADMINISTRATION, WELL PROGRAM

OK 08/15/2017
 (Signature)

DATE WELL ABANDONED: 7/28/17 (month/day/year)

* PERMIT NUMBER OF ABANDONED WELL (if any) _____

* PERMIT NUMBER OF REPLACEMENT WELL: _____


* PERSON ABANDONING WELL: Michael Barlow WELL DRILLER'S LICENSE NUMBER: 355

CIRCLE: MWD / MSD / MGD

* OWNER'S NAME: Elm Street Development

* WELL LOCATION:
 COUNTY: Howard
 NEAREST TOWN: Hamover
 TAX MAP _____ BLOCK _____ PARCEL _____
 SUBDIVISION: _____
 SECTION: _____ LOT: _____
 STREET ADDRESS: Floreys Road

SITE LOCATION MAP

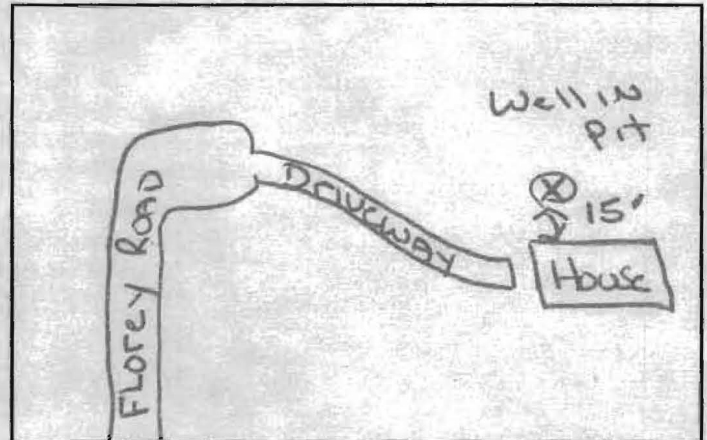

LATITUDE 3 9.20146 -

LONGITUDE 7 6.71613 -

* TYPE OF WELL BEING ABANDONED:
 DRILLED JETTED
 BORED HAND DUG
 OTHER (specify) _____

LOG OF SEALING MATERIAL

MATERIAL	FEET	
	FROM	TO
Cement	120	0

* USE CODE:
 DOMESTIC MUNICIPAL/PUBLIC
 IRRIGATION INDUSTRIAL
 TEST/OBSERVATION GEOTHERMAL

* TYPE OF CASING:
 STEEL PLASTIC
 CONCRETE OTHER (specify) _____

SIZE OF CASING: 6 INCHES IN DIAMETER

DEPTH OF WELL: 120 FEET DEEP

WAS ANY CASING REMOVED? NO

If yes, length removed, in feet: _____

WAS CASING RIPPED OR PERFORATED? NO

VOLUME OF MATERIAL USED

2250 lbs Cement

SIGNATURE-MASTER WELL DRILLER OR SUPERVISING SANITARIAN LICENSE# 355

MWD / MSD / MGS
 CIRCLE ONE

7/28/17 DATE

COUNTY



By Quality Grout, LLC

Technical Data Sheet

WELL GROUT™ Pre-Blended Grout

Description

Well Grout™ is a special pre-blended cementitious formulation designed for use in grouting boreholes containing ground source heat loops. Well Grout™, when combined with water at the prescribed dosage rate, yields a cohesive grout with excellent workability and grouting annular space in water well, etc..

The use of Well Grout™ guarantees consistent permeability and conductivity over the life of the well. Well Grout™ improves heat transfer efficiency by matching the thermal conductivity of the surrounding soil. It also allows for superior handling capability, batch control and QC/QA on the job site.

Application

Sealing/grouting of plastic ground source heat loops; sealing / grouting of annular spaces in wells and boreholes; creation of a low permeability, low shrinkage seal to prevent down-hole cross-contamination of aquifers; and to prevent entry of surface water into a borehole and/or well abandonment.

Properties

Well Grout™ Powder

Appearance: Black/gray, free-flowing powder

Specific gravity: 2.596

Bulk Density: 2.380

Particle Size (max): 1.18mm

Moisture: <0.5%

Mixed Well Grout™

Grout density: 40 to 50 lb/ft³

Compressive Strength: Min. 400 psi

Permeability: 3 x 10⁻⁷

Recommended Mixing Proportions

The recommended mix proportions are as follows:

Weight of Well Grout: 75lbs.

Water per 75lb bag: 5 gallons

Yield: 6.75 gallons

Packaging and Availability

Standard packaging: 75lb. bags, 56 bags per pallet, 40 x 48 pallet, shrink-wrapped.

The product is not susceptible to freezing, but must be protected from exposure to moisture.

Whole Grout Products can be purchased by contacting:

Quality Grout, LLC

950 Smile Way

York, PA 17404

Phone: 717.771.3545

Disclaimer: The statements in this bulletin are based upon data which is believed to be reliable, and is offered in good faith to be applied accordingly to the user's best judgment. Since operating conditions at project sites are beyond our control, Quality Grout, LLC will not assume responsibility for the accuracy of this data, or liability which may result from the use of its products.

Health Hazard Warning: Prolonged inhalation of dust associated with the unmixed powder described in this data sheet can cause respiratory distress. Avoid creating dust when handling, using or storing. Follow OSHA safety and Health Standards for fugitive dust.

Fogle's Septic Clean, Inc.

580 Obrecht Road
Sykesville, MD 21784

Invoice Date
7/27/2017

Invoice #
286511

INVOICE

**PLEASE PAY
THIS AMOUNT**

\$180.00

Make checks payable to: **Fogle's Septic Clean, Inc.**

Bill To:

GRIZ
MARK SLOWINSKI
3902 SWEET AIR RD
PHOENIX, MD 21131

Service Address

5910 FLOREY RD
ELKRIDGE

Phone # 410-795-5670

Fogle's Septic Clean, Inc.
580 Obrecht Road
Sykesville, MD 21784

PLEASE DETACH AND RETURN TOP PORTION WITH PAYMENT

P.O. No.	Due Date	Rep	Ship Date
	7/27/2017	JWB	7/26/2017

Description	Qty	Rate	Amount
PUMP SEPTIC FOR ABANDONMENT - TANK WAS EMPTY		180.00	180.00
<p>8-2-2017</p> <p>\$ 180.00</p> <p># 7961</p>			

	Total	\$180.00
1.5% interest will be charged monthly on all unpaid balances after 30 days. \$30 CHARGE FOR RETURNED CHECK. RECEIPT DATE STAMPS ARE STRICTLY ENFORCED for ALL DISCOUNTS. Billing Questions - call 410-795-5670	Payments/Credits	\$0.00
	Customer Total Balance	\$180.00



