



BARRY CASANOVA
KAREN CASANOVA
LOT 18
SPRING VALLEY CHASE
PLAT 9488
L 03245 / F 00435
ZONED: RR-DEO

GENERAL NOTES:

1. THE SUBJECT PROPERTY IS ZONED RR-DEO PER THE 7/28/2006 COMPREHENSIVE ZONING PLAN.
2. **PARCEL BACKGROUND:**
TAX MAP: 10
PARCEL: 184
DEED REFERENCE: 4038 / 0416
ELECTION DISTRICT: THIRD
ZONING: RR-DEO
AREA: 24.11 ACRES ±
3. ON-SITE TOPOGRAPHY SHOWN HEREON IS BASED ON FIELD RUN SURVEY BY CHRISTOPHER CONSULTANTS, INC. IN NOVEMBER, 2004. OFF-SITE TOPOGRAPHY BASED ON HOWARD COUNTY GIS.
4. PUBLIC WATER AND PRIVATE SEWER WILL BE UTILIZED.
5. SOILS DATA BASED ON HOWARD COUNTY GIS FILES.
6. THIS AREA DESIGNATES A PRIVATE SEWERAGE EASEMENT OF AT LEAST 10.000 SQ. FT. AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF ENVIRONMENT FOR INDIVIDUAL SEWERAGE DISPOSAL. IMPROVEMENTS OF ANY NATURE IN THIS AREA ARE RESTRICTED UNTIL PUBLIC SEWERAGE IS AVAILABLE. THIS EASEMENT SHALL BECOME NULL AND VOID UPON CONNECTION TO A PUBLIC SEWERAGE SYSTEM. THE COUNTY HEALTH OFFICER SHALL HAVE THE AUTHORITY TO GRANT ADJUSTMENTS TO THE PRIVATE SEWERAGE EASEMENT, & RECORDATION OF A MODIFIED EASEMENT SHALL NOT BE NECESSARY.
7. THIS AREA DESIGNATES AN EXISTING SEWERAGE EASEMENT.
11. THIS SYMBOL DESIGNATES A PASSING PERCOLATION TEST HOLE.
12. THIS SYMBOL DESIGNATES A FAILED PERCOLATION TEST HOLE.
13. TO THE BEST OF OUR KNOWLEDGE ALL ADJACENT RELEVANT WELL AND SEPTIC SYSTEMS WITHIN 100 FEET OF THE PROPERTY HAVE BEEN SHOWN.
14. THE LOTS SHOWN HEREON COMPLY WITH MINIMUM OWNERSHIP LOT WIDTH AND AREA AS REQUIRED BY MDE.
15. ANY CHANGES TO A PRIVATE SEWERAGE EASEMENT SHALL REQUIRE A REVISED PERC CERTIFICATION PLAN.
16. THIS AREA DESIGNATES SLOPES 25 PERCENT OR GREATER.
17. THIS AREA DESIGNATES THE 100-YEAR FLOODPLAIN.
18. **CnB(D)** DESIGNATES A SOIL MAP UNIT DIVISION
GgB(D)
19. ———— DESIGNATES AN EXISTING CONTOUR
20. ———— DESIGNATES A PROPOSED CONTOUR
21. PERCOLATION TEST LOCATIONS BASED ON APPROVED PERCOLATION CERTIFICATION PLAT PREPARED BY CHRISTOPHER CONSULTANTS, INC. IN 5/2005.

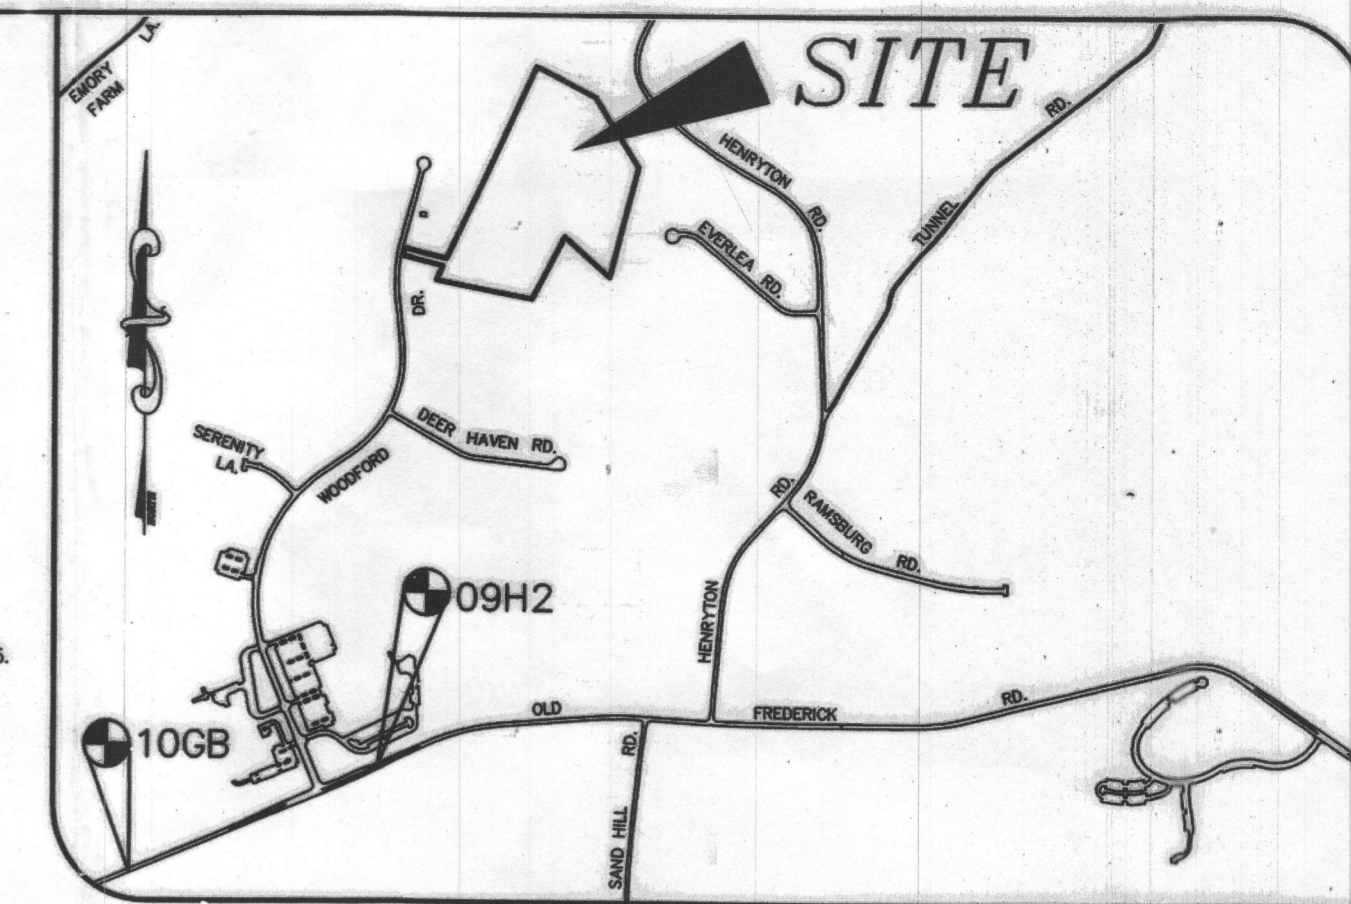


VICINITY MAP
1" = 1000'
ADD MAP 11 GRID E7, F7

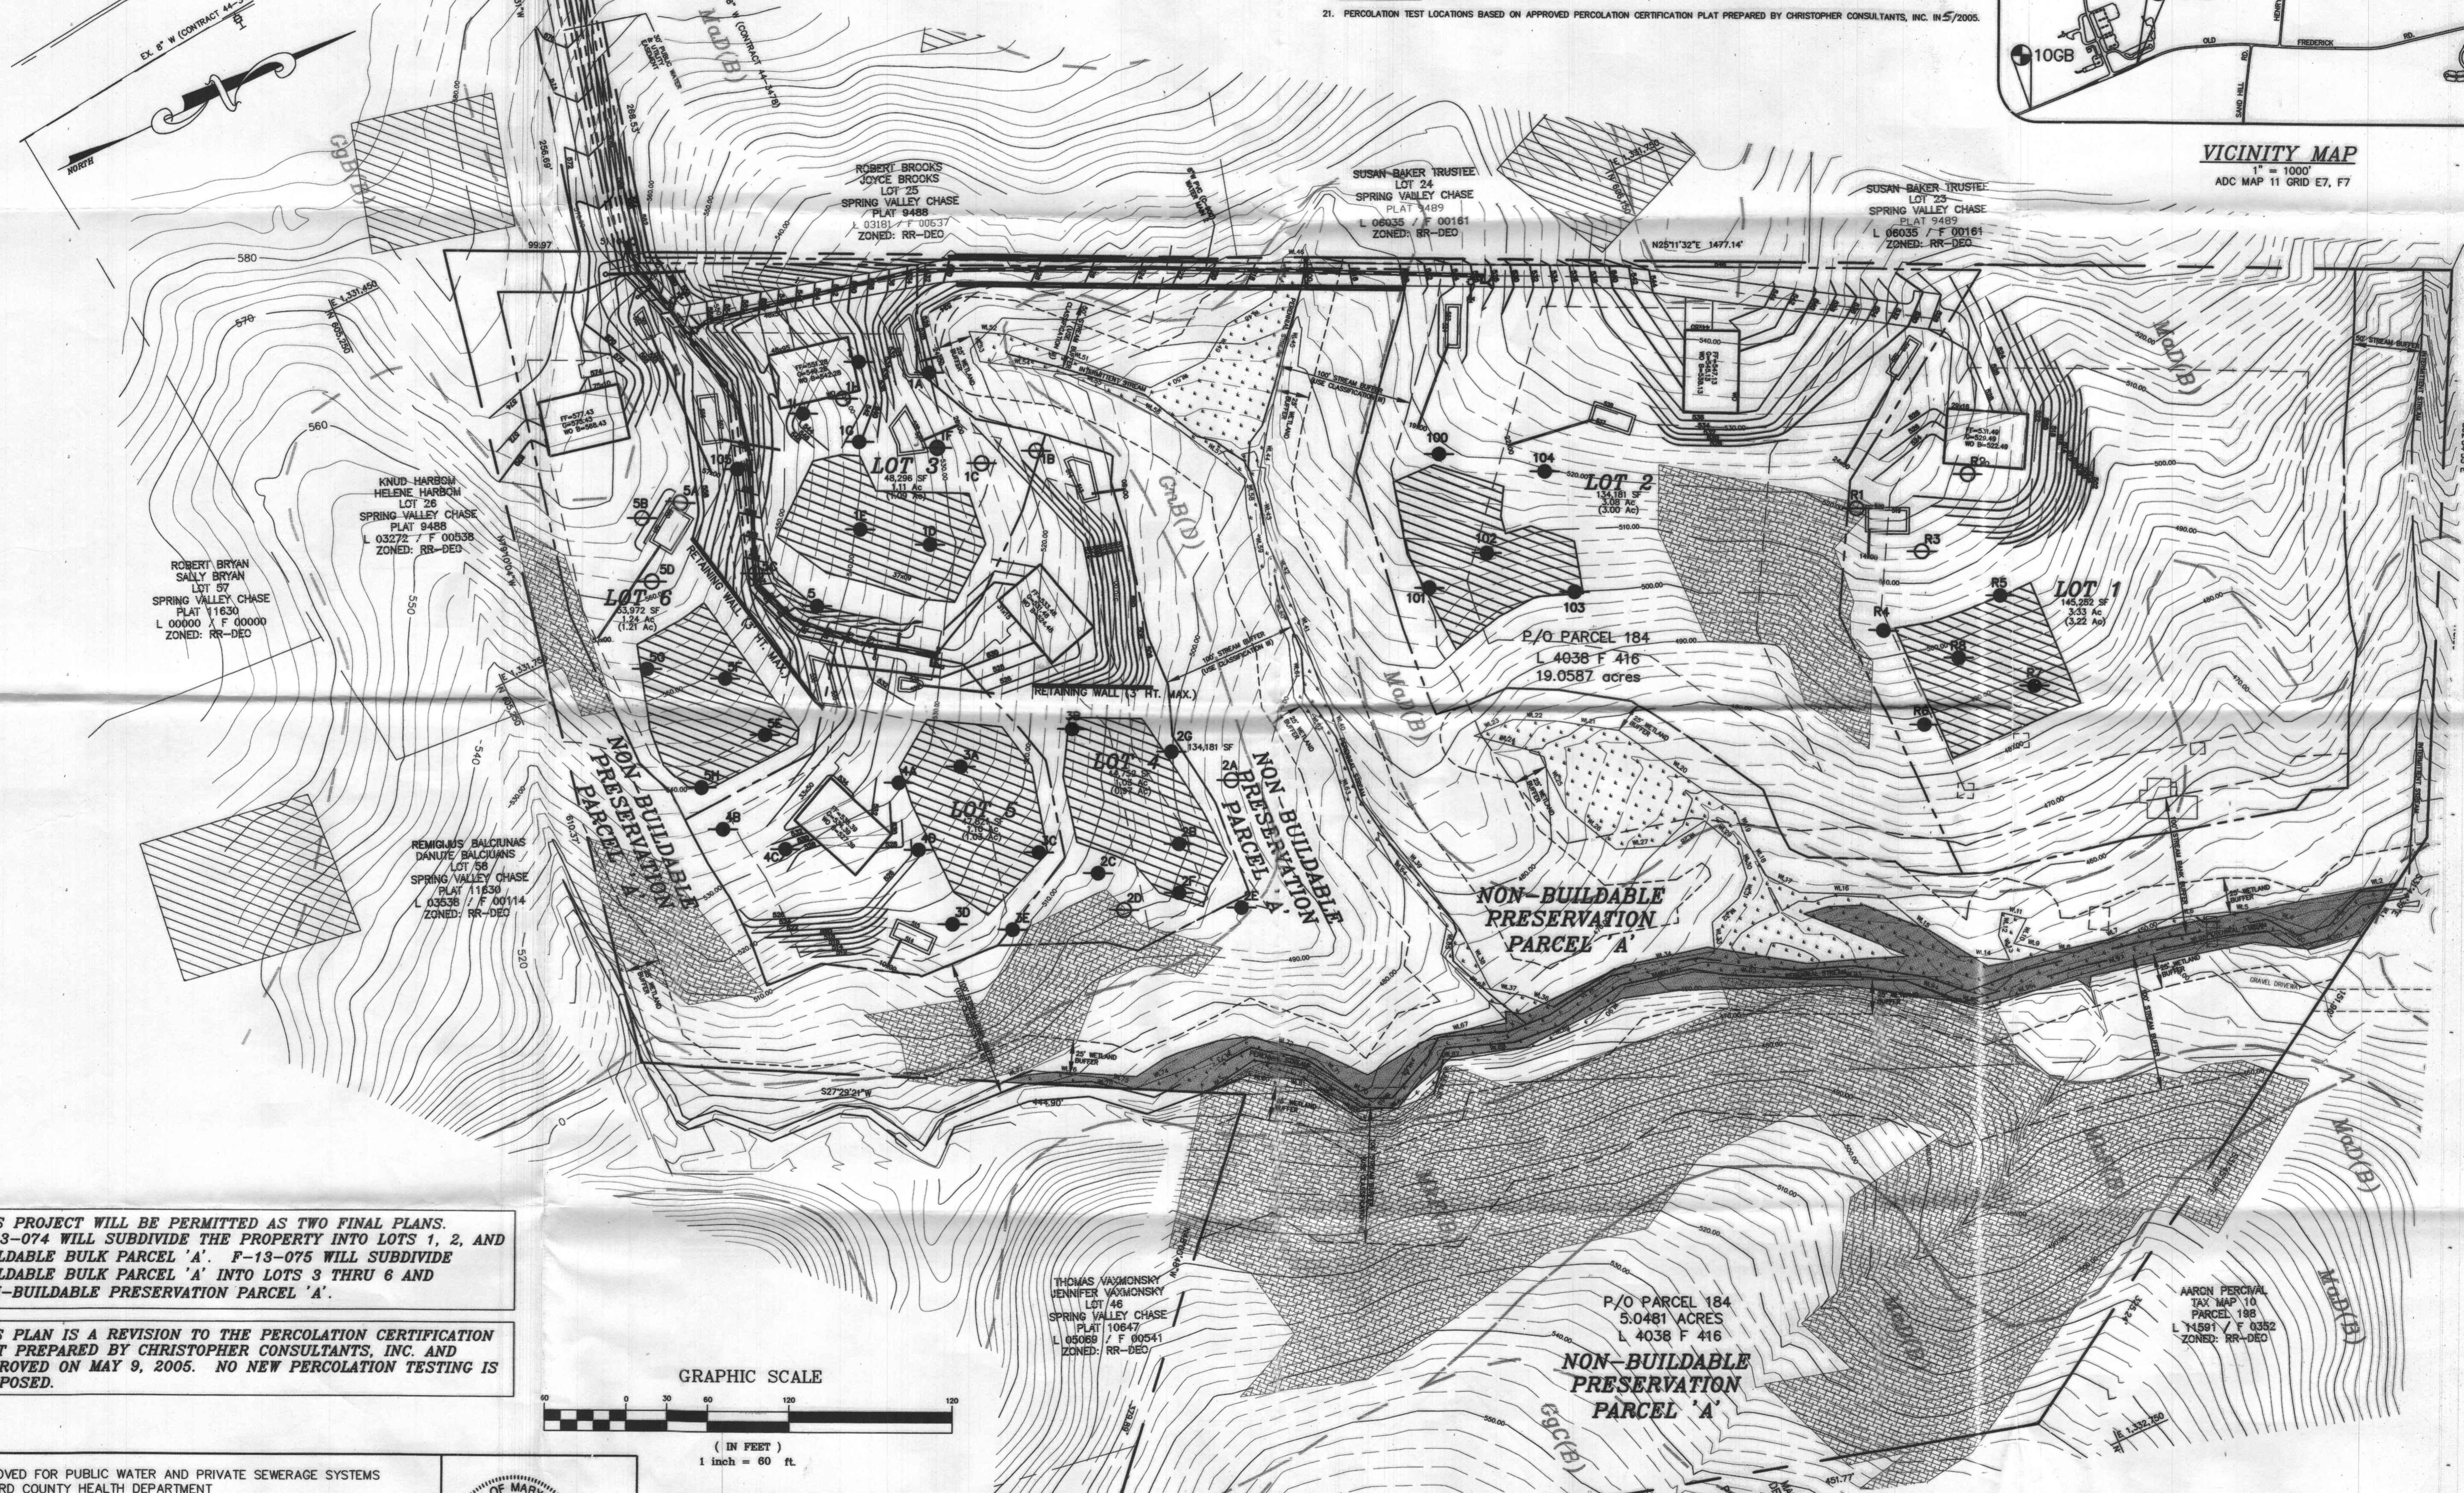

THIS PROJECT WILL BE PERMITTED AS TWO FINAL PLANS. F-13-074 WILL SUBDIVIDE THE PROPERTY INTO LOTS 1, 2, AND BUILDABLE BULK PARCEL 'A'. F-13-075 WILL SUBDIVIDE BUILDABLE BULK PARCEL 'A' INTO LOTS 3 THRU 6 AND NON-BUILDABLE PRESERVATION PARCEL 'A'.

THIS PLAN IS A REVISION TO THE PERCOLATION CERTIFICATION PLAT PREPARED BY CHRISTOPHER CONSULTANTS, INC. AND APPROVED ON MAY 9, 2005. NO NEW PERCOLATION TESTING IS PROPOSED.

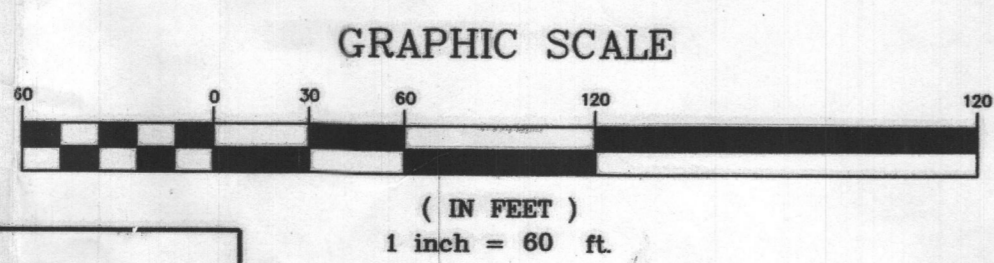

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. 40091, EXP DATE 2/13/15.
J. Kelly Slovan 6/13/15
J. KELLY SLOVAN, P.E. DATE

ANANIA HEJEBU
SPYCIK HEJEBU
LOT 49
SPRING VALLEY CHASE
PLAT 10647
L 08232 / F 00448
ZONED: RR-DEO

SOILS DESCRIPTION

SYMBOL	HYDROLOGICAL GROUP	DESCRIPTION
GB	B	GENESEE LOAM, 3 TO 8% SLOPE
GB	B	GENESEE-BAILEY SILT LOAM, 0 TO 8% SLOPE
MD	B	MANOR LOAM, 15 TO 25% SLOPE
MP	B	MANOR-BRINGLOW COMPLEX (ROCKY) - 25 TO 65% SLOPE

APPROVED FOR PUBLIC WATER AND PRIVATE SEWERAGE SYSTEMS
HOWARD COUNTY HEALTH DEPARTMENT




Michael J. Casanova 6/13/15
HOWARD COUNTY HEALTH OFFICER DATE

Project	12-028	date	JUN 2013
Illustration	JLS	engineering	JLS
JLS	JLS	approval	RH
scale	1"=60'		

description	revisions
no.	date

MELCHIOR PROPERTY
LOTS 1 THRU 6, AND NON-BUILDABLE PRESERVATION PARCEL A
TAX MAP 10 - GRID 13 PARCEL 184
3rd ELECTION DISTRICT
HOWARD COUNTY, MARYLAND
REVISED PERCOLATION CERTIFICATION PLAN

MILDENBERG, BOENDER & ASSOC., INC.
Engineers Planners Surveyors
6800 Beppath Road, Suite 150, Ellicott City, MD 21075
(410) 997-0286 Cell (410) 997-0288 Fax

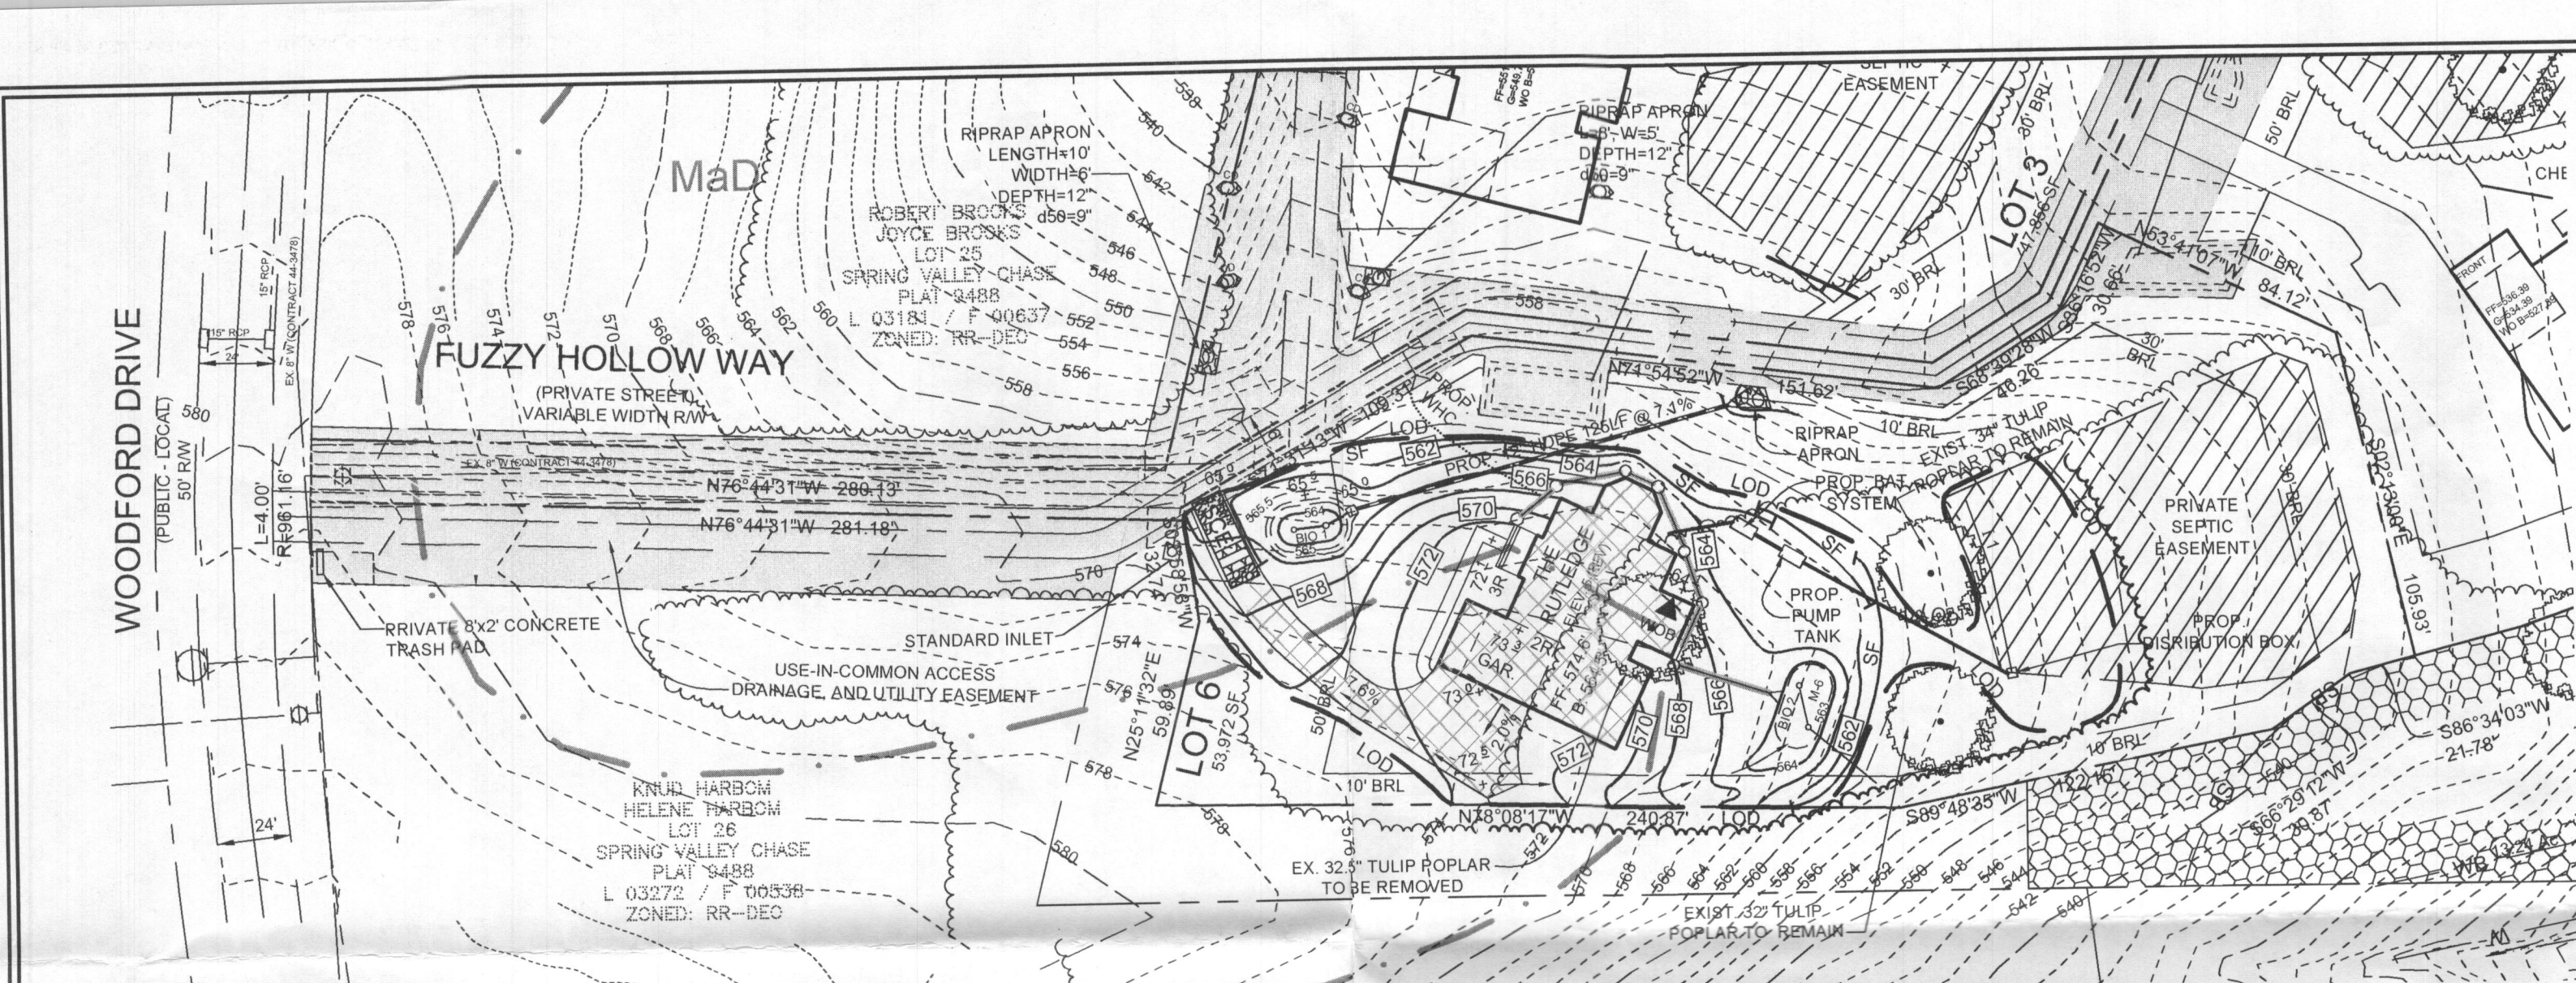

PLAN VIEW
SCALE: 1"=50'

SOILS LEGEND			
SYMBOL	NAME / DESCRIPTION	GROUP	'K' FACTOR
GgB	GLADSTONE LOAM, 3 TO 8 PERCENT SLOPES	B	0.20
MdD	MANOR LOAM, 15 TO 25 PERCENT SLOPES	B	0.24

NOTES:
 1) SOIL INFORMATION HAS BEEN TAKEN FROM THE UNITED STATES DEPARTMENT OF AGRICULTURE, NATURAL RESOURCES CONSERVATION SERVICE, WEB SOIL SURVEY.
 2) HIGHLY ERODIBLE SOILS ARE THOSE SOILS WITH A SLOPE GREATER THAN 15 PERCENT OR THOSE SOILS WITH A SOIL ERODIBILITY FACTOR 'K' GREATER THAN 0.35 AND WITH A SLOPE GREATER THAN 5 PERCENT.



OPERATION AND MAINTENANCE SCHEDULE FOR PRIVATELY OWNED AND MAINTAINED DISCONNECTION OF ROOFTOP RUNOFF (N-1), DISCONNECTION OF NON-ROOFTOP RUNOFF (N-2)

a. MAINTENANCE OF AREAS RECEIVING DISCONNECTED RUNOFF IS GENERALLY NO DIFFERENT THAN THAT REQUIRED FOR OTHER LAWN OR LANDSCAPED AREAS. THE OWNER SHALL ENSURE THE AREAS RECEIVING RUNOFF ARE PROTECTED FROM FUTURE COMPACTION OR DEVELOPMENT OF IMPERVIOUS AREA. IN COMMERCIAL AREAS, FOOT TRAFFIC SHOULD BE DISCOURAGED AS WELL.

OPERATION AND MAINTENANCE SCHEDULE FOR PRIVATELY OWNED AND MAINTAINED BIORETENTION FACILITIES (M-6 & F-6)

a. THE OWNER SHALL MAINTAIN THE PLANT MATERIAL, MULCH LAYER AND SOIL LAYER ANNUALLY. MAINTENANCE OF MULCH AND SOIL IS LIMITED TO CORRECTING AREAS OF EROSION OR WASH OUT. ANY MULCH REPLACEMENT SHALL BE DONE IN THE SPRING. PLANT MATERIAL SHALL BE CHECKED FOR DISEASE AND INSECT INFESTATION AND MAINTENANCE WILL ADDRESS DEAD MATERIAL AND PRUNING. ACCEPTABLE REPLACEMENT PLANT MATERIAL IS LIMITED TO THE FOLLOWING: 2000 MARYLAND STORMWATER DESIGN MANUAL, VOLUME II, TABLE A.4.1 AND 2.
 b. THE OWNER SHALL PERFORM A PLANT INSPECTION IN THE SPRING AND IN THE FALL OF EACH YEAR. DURING THE INSPECTION, THE OWNER SHALL REMOVE DEAD OR DISEASED VEGETATION CONSIDERED BEYOND TREATMENT, REPLACE DEAD PLANT MATERIAL WITH ACCEPTABLE REPLACEMENT PLANT MATERIAL, TREAT DISEASED TREES AND SHRUBS, AND REPLACE ALL DEFICIENT STAKES AND WIRES.
 c. THE OWNER SHALL INSPECT THE MULCH EACH SPRING. THE MULCH SHALL BE REPLACED EVERY TWO TO THREE YEARS. THE PREVIOUS MULCH LAYER SHALL BE REMOVED BEFORE THE NEW LAYER IS APPLIED.
 d. THE OWNER SHALL CORRECT SOIL EROSION ON AN AS NEEDED BASIS, WITH A MINIMUM OF ONCE PER MONTH AND AFTER EACH HEAVY STORM.

LEGEND

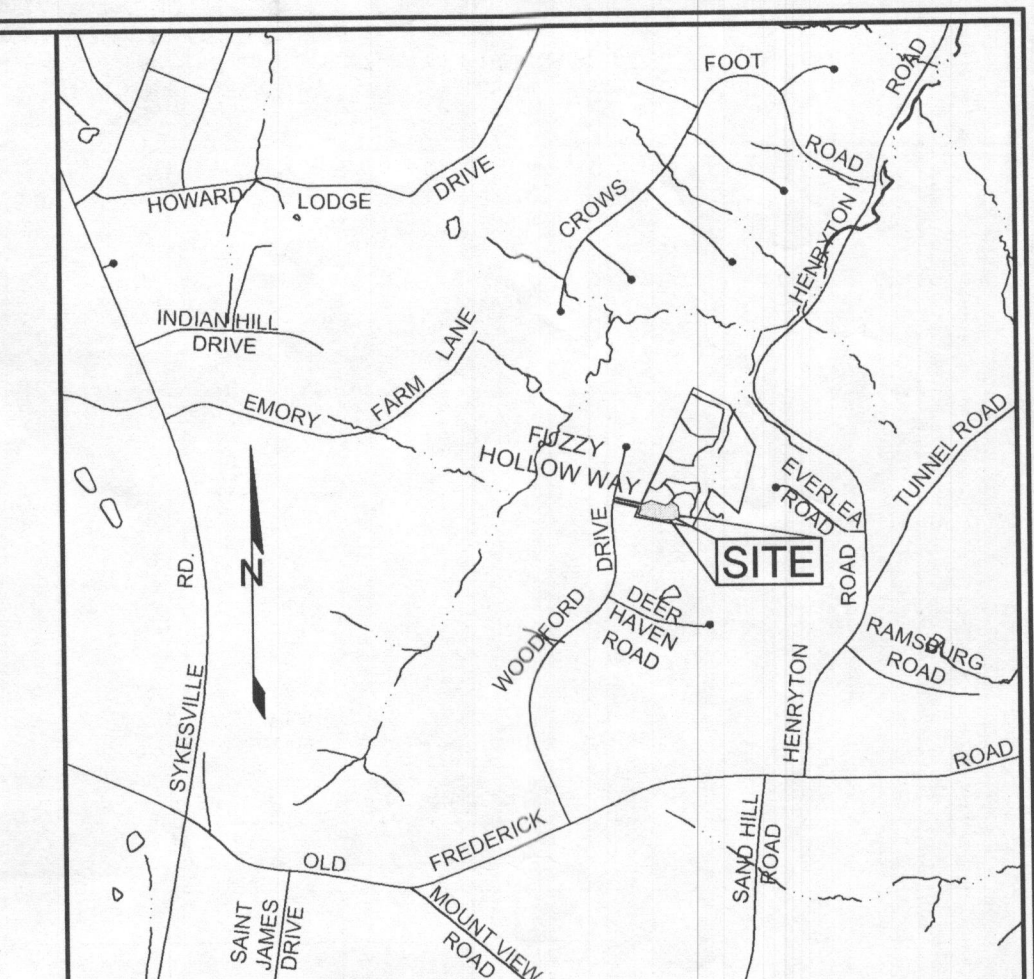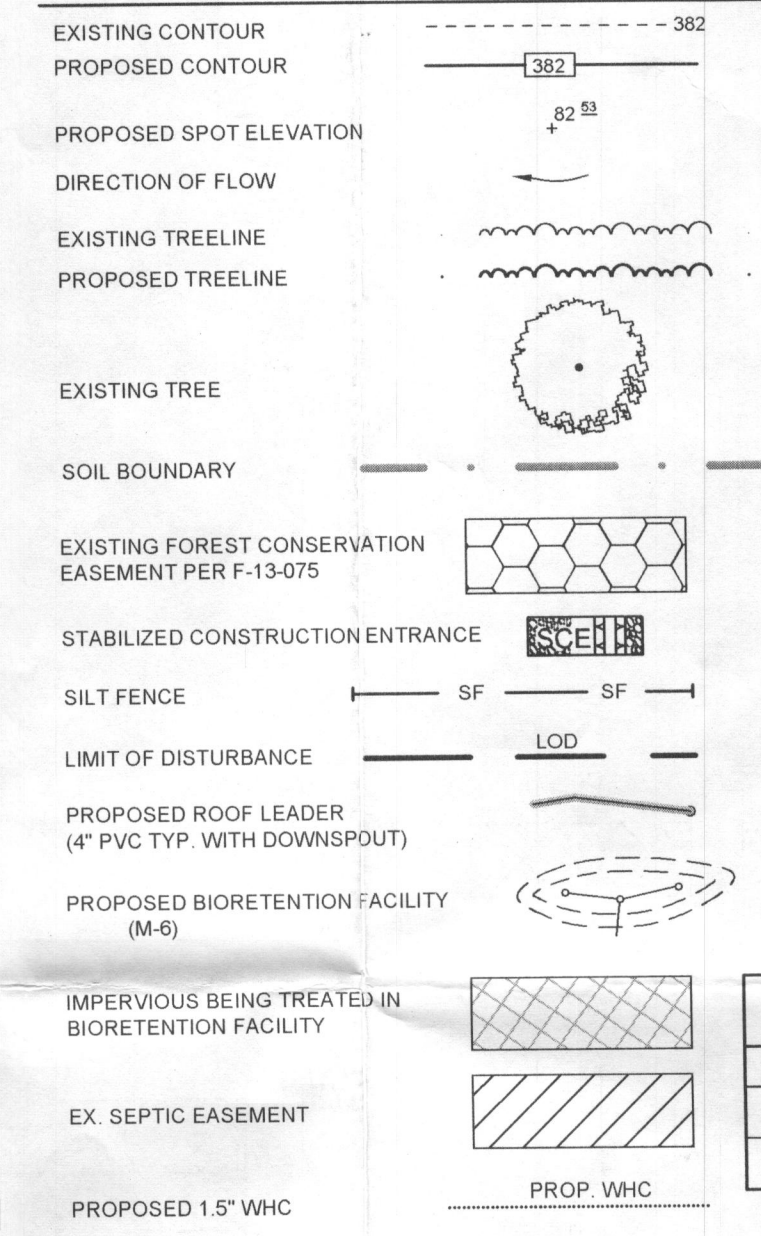


VICINITY MAP
SCALE: 1"=2000'

BENCHMARKS				
NUMBER	NORTHING	EASTING	ELEVATION	DESCRIPTION
09H2	601,676.7	1,329,521.0	640.22	N SIDE OF RT. 99, 0.8 MILE TO RT. 32, 50' TO C.L. OF MT. VIEW, 48" N OF POL#102490
10GB	602,276.0	1,331,069.4	597.35	S SIDE OF RT. 99, 59' E OF POLE #G-27, 100' W OF F.H.

GENERAL NOTES

- SUBJECT PROPERTY ZONED RR-DEO PER 10/06/13 COMPREHENSIVE ZONING PLAN.
- TOTAL AREA OF LOT = 53,972 SF OR 1.2390 AC ±.
- PUBLIC WATER AND PRIVATE SEWER WILL BE USED WITHIN THIS SITE.
- THIS AREA DESIGNATES A PRIVATE SEWAGE EASEMENT, OF AT LEAST 10,000 SF AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF THE ENVIRONMENT FOR INDIVIDUAL SEWAGE DISPOSAL (COMAR 26.04.03). IMPROVEMENTS OF ANY NATURE IN THIS AREA ARE RESTRICTED UNTIL PUBLIC SEWERAGE IS AVAILABLE. THESE EASEMENTS SHALL BECOME NULL AND VOID UPON CONNECTION TO A PUBLIC SEWERAGE SYSTEM. THE COUNTY HEALTH OFFICER SHALL HAVE THE AUTHORITY TO GRANT ADJUSTMENTS TO THE PRIVATE SEWAGE EASEMENT. RECORDATION OF A MODIFIED SEWAGE EASEMENT SHALL NOT BE NECESSARY.
- WATER WILL BE PUBLIC (CONTRACT # 44-4791-D). WATER SERVICE TO THIS LOT WILL BE GRANTED UNDER PROVISIONS OF SECTION 18.122 B OF THE HOWARD COUNTY CODE VIA CONNECTIONS TO EXISTING CONTRACT # W-44-3478.
- ALL EXISTING WELLS, SEPTIC SYSTEMS AND SEWAGE DISPOSAL EASEMENTS WITHIN 100 FEET OF THE PROPERTY BOUNDARIES AND ALL EXISTING AND PROPOSED WELLS THAT ARE LOCATED WITHIN 200 FEET DOWN GRADIENT OF EXISTING OR PROPOSED SEPTIC SYSTEMS AND SEWAGE DISPOSAL EASEMENTS HAVE BEEN FIELD LOCATED.
- THE BOUNDARY SHOWN HEREON IS BASED ON A FIELD RUN BOUNDARY SURVEY PREPARED BY MILDENBERG, BOENDER AND ASSOC. IN OCTOBER 2012.
- THE TOPOGRAPHY SHOWN HEREON HAS BEEN FIELD RUN BY CHRISTOPHER CONSULTANTS, INC. IN NOVEMBER 2004. THE EXISTING TOPOGRAPHY SHOWN OUTSIDE THE SITE IS BASED ON HOWARD COUNTY AERIAL TOPOGRAPHY FLOWN IN 2004.
- THE SOILS SHOWN HAVE BEEN TAKEN FROM THE NRCS WEB SOIL SURVEY WEBSITE.
- THE COORDINATES SHOWN HEREON ARE BASED UPON THE HOWARD COUNTY GEODETIC CONTROL, WHICH IS BASED ON THE MARYLAND STATE PLANE COORDINATE SYSTEM. HOWARD COUNTY MONUMENTS, NUMBERS 09H2 AND 10GB, WERE USED FOR THIS PROJECT.
- THERE ARE NO HISTORIC STRUCTURES OR CEMETERIES WITHIN THE PROJECT BOUNDARY.
- THE CONTRACTOR SHALL NOTIFY MISS UTILITY AT 1-800-257-7777 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION WORK BEING DONE.
- ANY DAMAGE TO PUBLIC RIGHT-OF-WAYS, PAVING OR EXISTING UTILITIES WILL BE CORRECTED AT THE CONTRACTOR'S EXPENSE.
- THE LOTS SHOWN HEREON COMPLY WITH THE MINIMUM OWNERSHIP WIDTH AND LOT AREA AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF THE ENVIRONMENT.
- ALL DITCHES AND SWALES WILL HAVE SOIL STABILIZATION MATTING UNLESS SOD IS BEING UTILIZED.
- NO GRADING, REMOVAL OF VEGETATIVE COVER OR TREES, PAVING AND NEW STRUCTURES SHALL BE PERMITTED WITHIN THE LIMITS OF WETLANDS, STREAMS, OR THEIR REQUIRED BUFFERS, FLOODPLAIN AND FOREST CONSERVATION EASEMENT AREAS, UNLESS WAIVERS HAVE BEEN APPROVED.
- STORMWATER MANAGEMENT OBLIGATIONS FOR THIS LOT HAVE BEEN MET BY ROOFTOP DISCONNECTS, NON ROOFTOP DISCONNECTS AND MICRO BIORETENTION FACILITIES.
- WITHIN 200 FEET DOWN GRADIENT OF EXISTING OR PROPOSED SEPTIC SYSTEMS AND SEWAGE DISPOSAL EASEMENTS, NON ROOFTOP DISCONNECTS AND MICRO BIORETENTION FACILITIES UNDER F - SEE THE FINAL STORMWATER MANAGEMENT REPORT FOR ADDITIONAL INFORMATION.
- REFUSE COLLECTION, SNOW REMOVAL, AND ROAD MAINTENANCE FOR PIPESTEM LOTS ARE PROVIDED TO THE JUNCTION OF THE PUBLIC ROAD AND THE PIPESTEM DRIVEWAY. COUNTY TRASH AND RECYCLING COLLECTION WILL BE AT WOODFORD DRIVE WITHIN 5' OF THE COUNTY ROADWAY.
- DRIVEWAY(S) SHALL BE PROVIDED PRIOR TO ISSUANCE OF A USE AND OCCUPANCY PERMIT FOR ANY NEW DWELLINGS TO ENSURE SAFE ACCESS FOR FIRE AND EMERGENCY VEHICLES PER THE FOLLOWING REQUIREMENTS:
 1) WIDTH - 12 FEET (16 FEET SERVING MORE THAN ONE RESIDENCE);
 2) SURFACE - SIX (6) INCHES OF COMPACTED CRUSHER RUN BASE WITH TAR AND CHIP COATING (1-1/2" MINIMUM);
 3) GEOMETRY - MAXIMUM 15% GRADE, MAXIMUM 10% GRADE CHANGE AND 45-FOOT TURNING RADIUS;
 4) STRUCTURES (CULVERTS/BRIDGES) - CAPABLE OF SUPPORTING 25 GROSS TONS (H25-LOADING);
 5) DRAINAGE ELEMENTS - CAPABLE OF SAFELY PASSING 100 YEAR FLOOD WITH NO MORE THAN 1 FOOT DEPTH OVER DRIVEWAY SURFACE;
 6) MAINTENANCE - SUFFICIENT TO ENSURE ALL WEATHER USE.
 PROVIDE SOD FOR 10' UPSTREAM AND DOWNSTREAM OF ALL CULVERTS, AND FOR ONE VERTICAL FOOT ALONG SWALE SIDES.
 20. LIMIT OF DISTURBANCE = 24,499 ± SQ. FT.

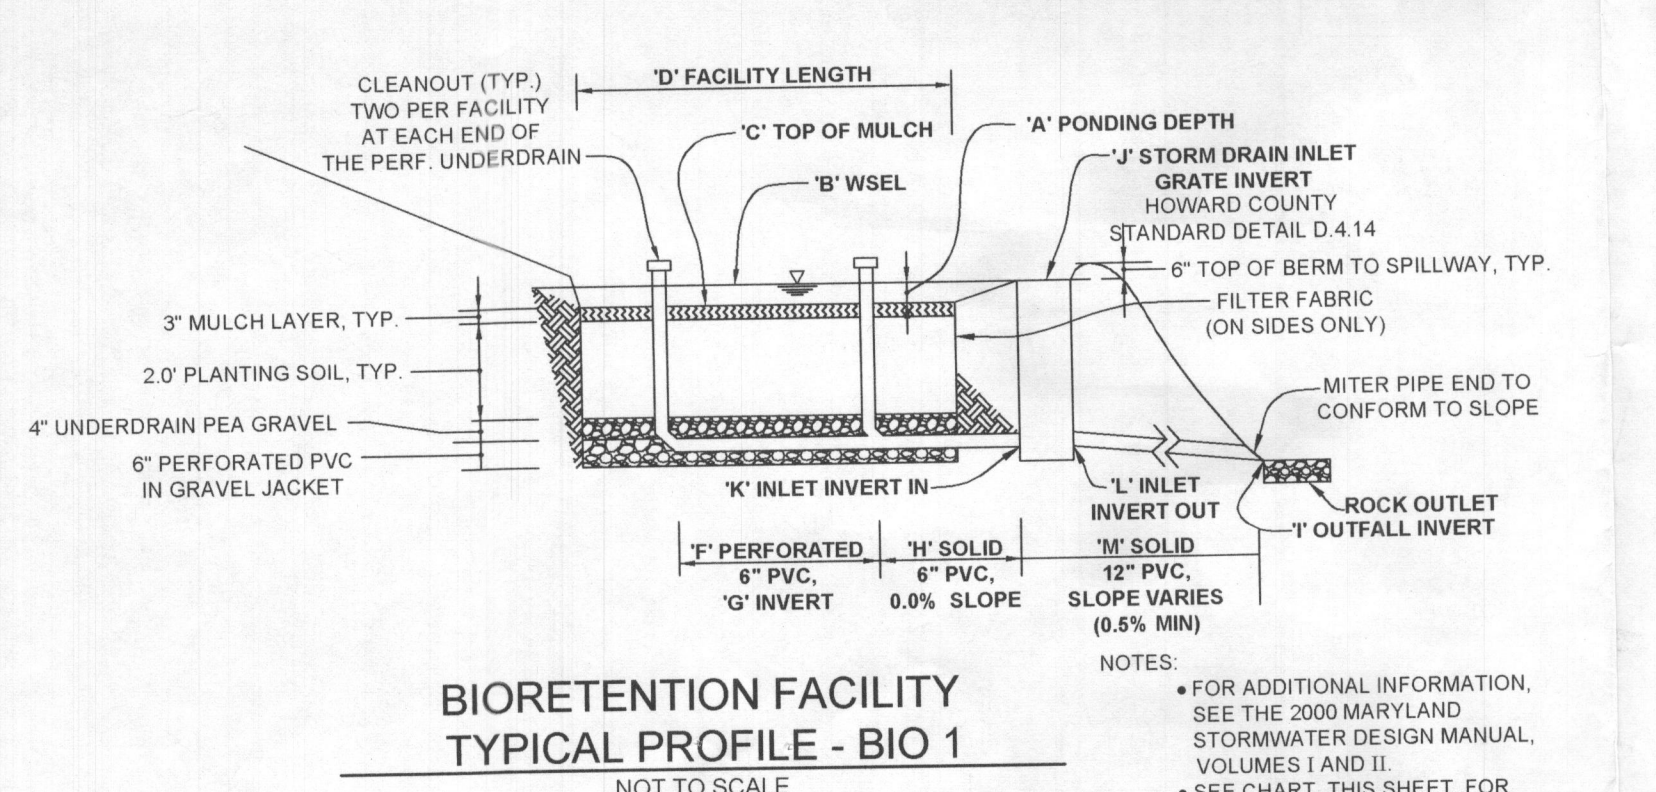

BIORETENTION ELEVATIONS AND DIMENSIONS

DESCRIPTION	BIO 1	BIO 2
'A' PONDING DEPTH	1.0'	1.0'
'B' WSEL	565.00	564.00
'C' TOP OF MULCH	564.00	563.00
'D' FACILITY LENGTH	21.5'	27.6'
'E' FACILITY WIDTH	10.0'	14.0'
'F' PERF. UNDERDRAIN DIMENSION	7.7'	12.0'
'G' UNDERDRAIN INVERT	560.92	559.91
'H' SOLID UNDERDRAIN DIMENSION	8.0'	27.3'
'I' OUTFALL INVERT	552.00	559.00
'J' STORM DRAIN INLET GRATE INVERT	565.00	N/A
'K' STORM DRAIN INLET INVERT IN	560.92	N/A
'L' STORM DRAIN INLET INVERT OUT	560.82	N/A
'M' STORM DRAIN PIPE DIMENSION	125.4	N/A

PIPE SCHEDULE


SIZE	TYPE	LENGTH
6" PERFORATED	PVC	19.7 LF
6" SOLID	PVC	24 LF
12" SOLID	PVC	125.4 LF

STANDARD STABILIZATION NOTE

FOLLOWING INITIAL SOIL DISTURBANCE OR REDISTURBANCE, PERMANENT OR TEMPORARY STABILIZATION MUST BE COMPLETED WITHIN:
 a. THREE (3) CALENDAR DAYS AS TO THE SURFACE OF ALL PERIMETER DIKES, SWALES, DITCHES, PERIMETER SLOPES AND ALL SLOPES STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1); AND
 b. SEVEN (7) CALENDAR DAYS AS TO ALL OTHER DISTURBED OR GRADED AREAS ON THE PROJECT SITE NOT UNDER ACTIVE GRADING AND PROVIDE NECESSARY MAINTENANCE TO THE SEDIMENT CONTROL MEASURES ON THIS PLAN.

MATERIALS SPECIFICATIONS FOR MICRO-BIORETENTION FACILITIES

MATERIAL	SPECIFICATION	SIZE	NOTES
PLANTINGS	SEE PLANT LIST THIS SHEET	N/A	PLANTINGS ARE SITE-SPECIFIC. SEE PLANT LIST THIS SHEET
PLANTING SOIL (2-4 DEEP)	LOAMY SAND (60% - 65%) & COMPOST (35% - 40%) OR SANDY LOAM (30%), COARSE SAND (30%) & COMPOST (40%)	N/A	USDA SOIL TYPES LOAMY SAND OR SANDY LOAM; CLAY CONTENT < 5%
ORGANIC CONTENT	MIN. 10% BY DRY WEIGHT (ASTM-D-2974)		AGED 6 MONTHS, MINIMUM. NO PINE OR WOOD CHIPS
MULCH	SHREDDED HARDWOOD		
PEA GRAVEL DIAPHRAGM AND CURTAIN DRAIN, IF REQUIRED	PEA GRAVEL: ASTM-D-448	PEA GRAVEL: NO. 8 OR NO. 9 (1/8" TO 3/8")	
GEOTEXTILE	ORNAMENTAL STONE: WASHED COBBLES	STONE: 2" TO 5"	PE TYPE 1 NONWOVEN
UNDERDRAIN GRAVEL	AASHTO M-43	NO. 57 OR NO. 8 AGGREGATE (3/8" TO 3/4")	
UNDERDRAIN PIPING	F 758, TYPE PS 28 OR AASHTO M-278	4" TO 6" RIGID SCHEDULE 40 PVC OR SDR35	SLOTTED OR PERFORATED PIPE, 3/8" PERFOR. @ 6" ON CENTER, 4 HOLES PER ROW, MINIMUM OF 3" OF GRAVEL OVER PIPES, NOT NECESSARY UNDERNEATH PIPES. PERFORATED PIPE SHALL BE WRAPPED WITH 1/4" GALVANIZED HARDWARE CLOTH.

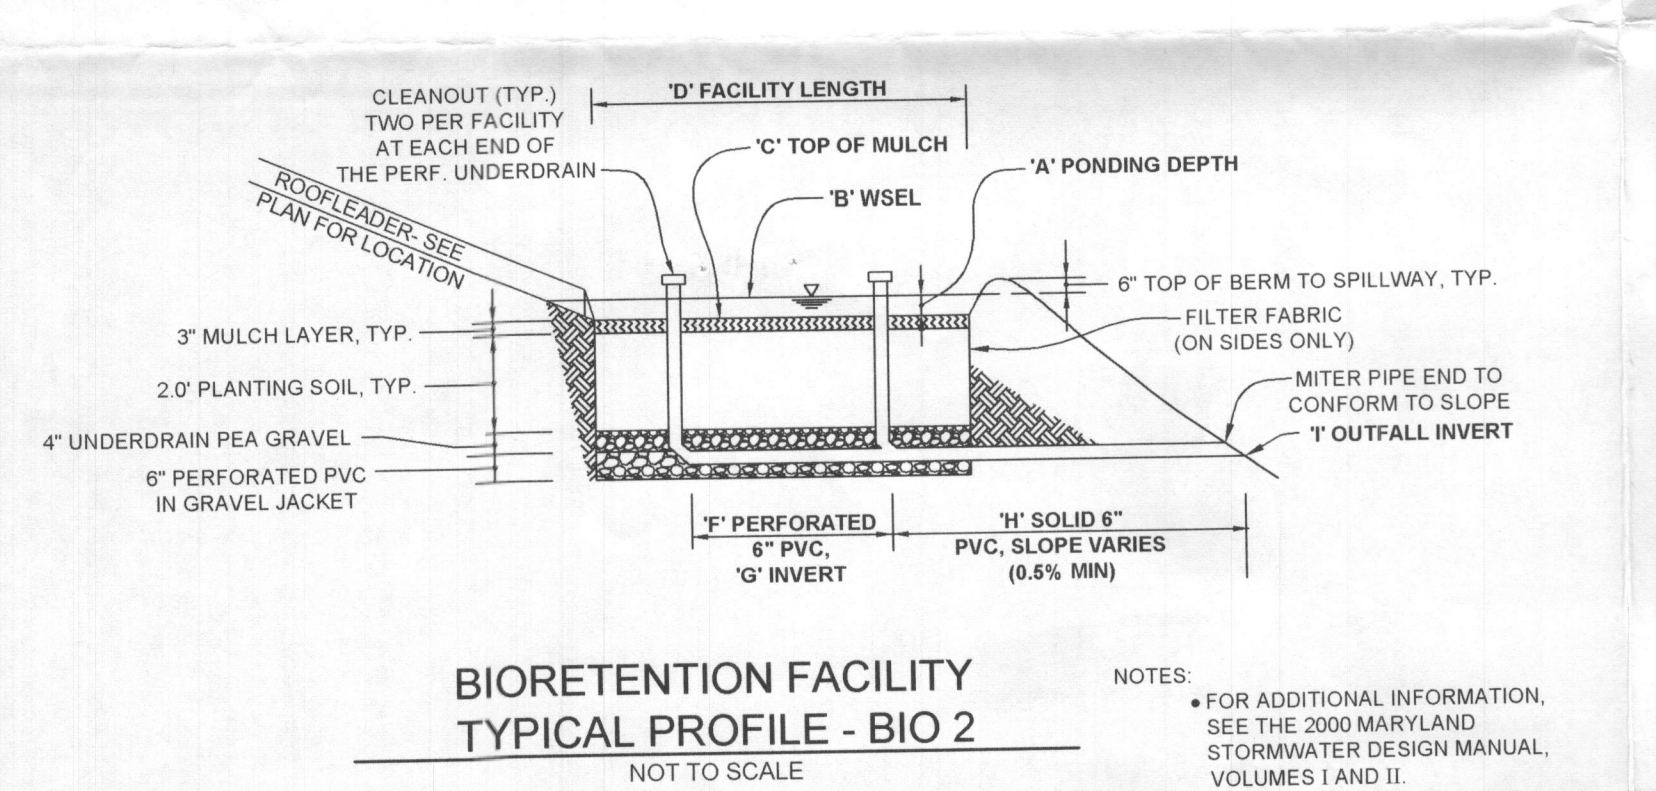

STORMWATER MANAGEMENT PRACTICES


LOT #	ADDRESS	MICRO-BIORETENTION (NUMBER)
6	11030 FUZZY HOLLOW WAY	2

NOTE: ALL ROOFTOP DRAINAGE MUST BE CONVEYED TO A BIORETENTION FACILITY.


BIORETENTION PLANT LIST

SHRUBS							
LEGEND	BOTANICAL NAME	COMMON NAME	SPACING	SIZE	REMARKS	QTY. BIO 1	QTY. BIO 2
(X)	CORNUS AMOMUM	SILKY DOGWOOD	AS SHOWN (MIN. 10' O.C.)	18"-24" HT.	CONT.	1	2
HERBACEOUS SPECIES							
LEGEND	BOTANICAL NAME	COMMON NAME	SPACING	SIZE	REMARKS	QTY. BIO 1	QTY. BIO 2
(O)	MONARDA DIDYMA	BEEBALM	AS SHOWN (MIN. 3' O.C.)	1 QT.	CONT.	N/A	3
(O)	RUDEBECKIA LACINIATA	TALL CONEFLOWER	AS SHOWN (MIN. 3' O.C.)	1 QT.	CONT.	2	N/A

NOTE: PLANT MATERIAL MUST COVER 50% OF THE MULCH AREA AT MATURE GROWTH.
 INTERPERSE PLANTINGS THROUGHOUT BIORETENTION FILTER AREA
 BIO 1 - BIORETENTION AREA = 1,260 S.F. OR 0.029 AC. PROVIDED: 1 SHRUBS AND 2 HERBACEOUS SPECIES
 BIO 2 - BIORETENTION AREA = 387 S.F. OR 0.009 AC. PROVIDED: 2 SHRUBS AND 3 HERBACEOUS SPECIES

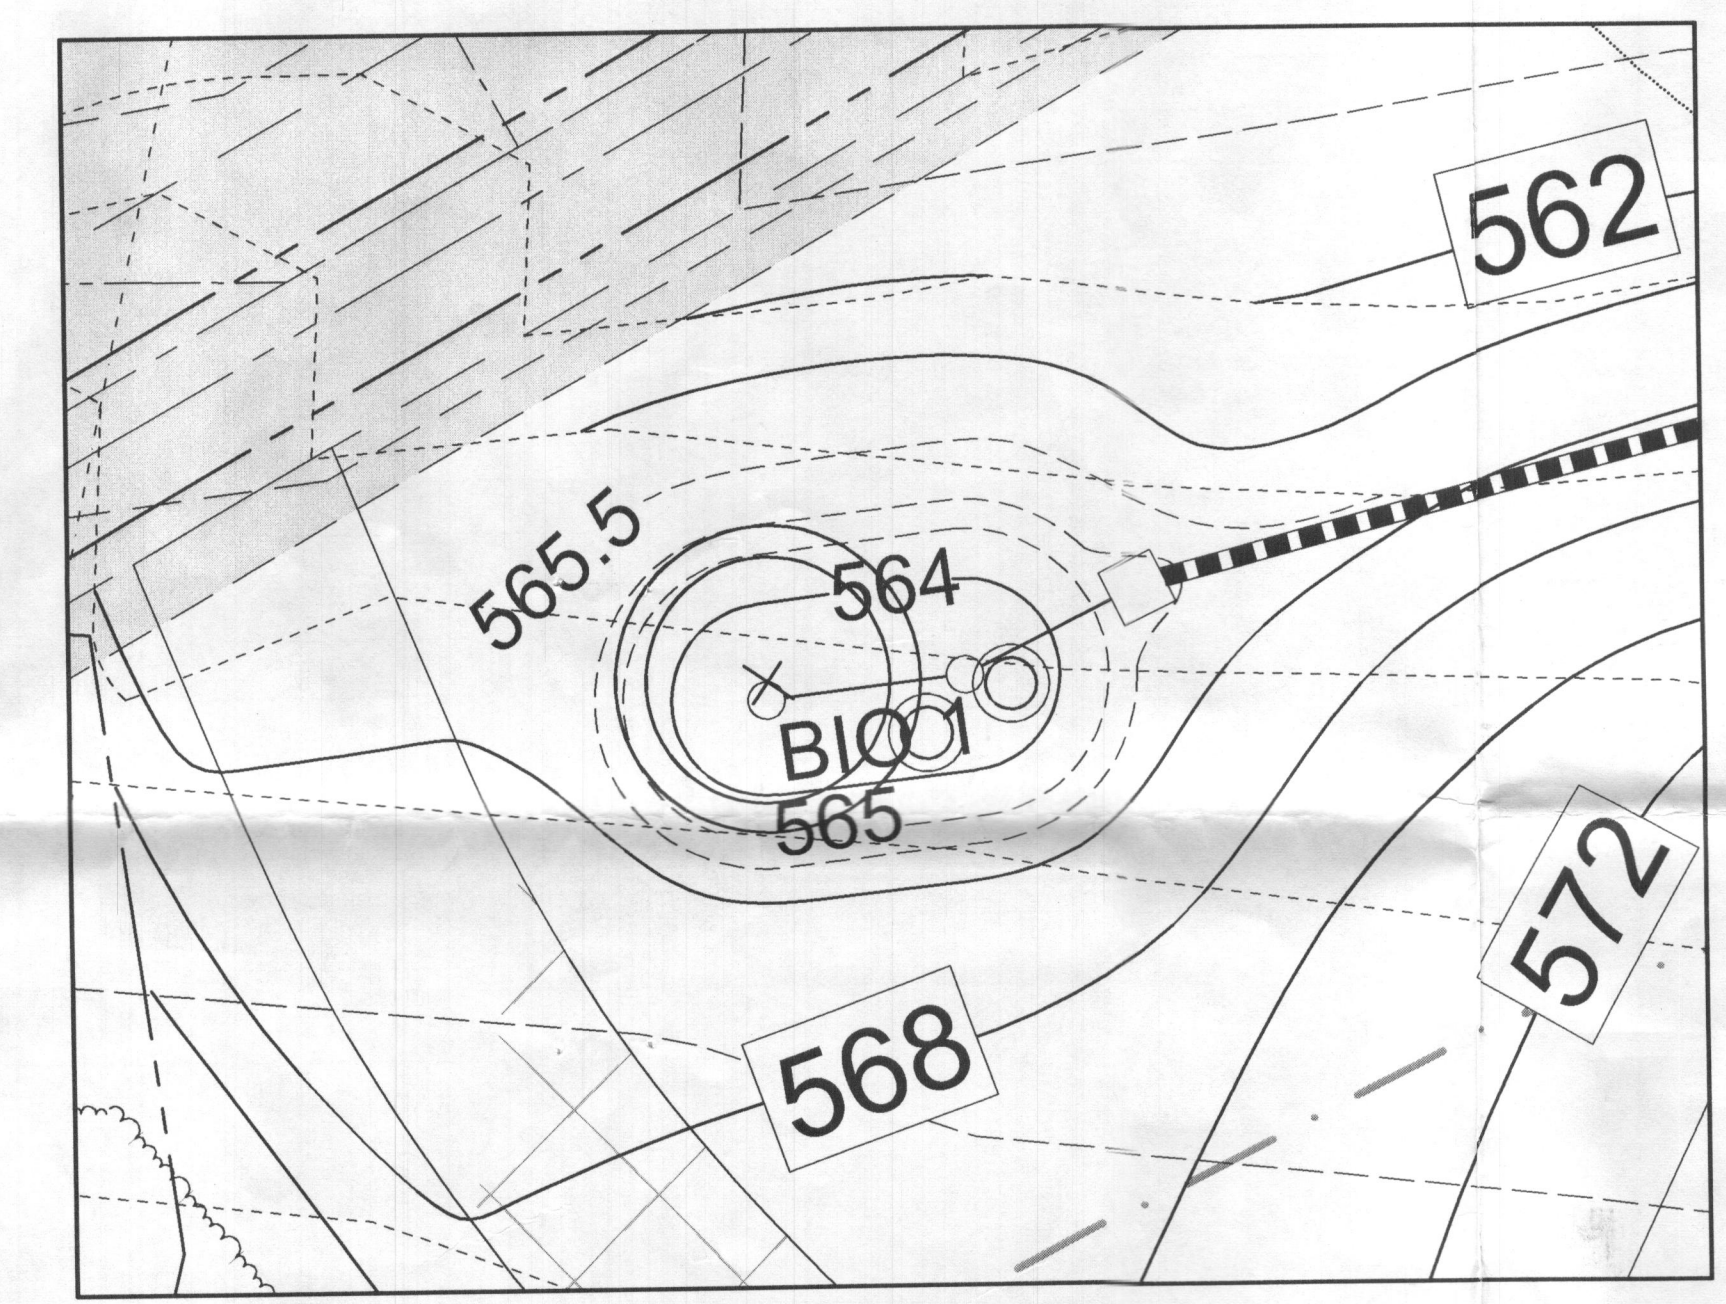

LANDSCAPING PLAN - BIO 1
SCALE: 1"=10'

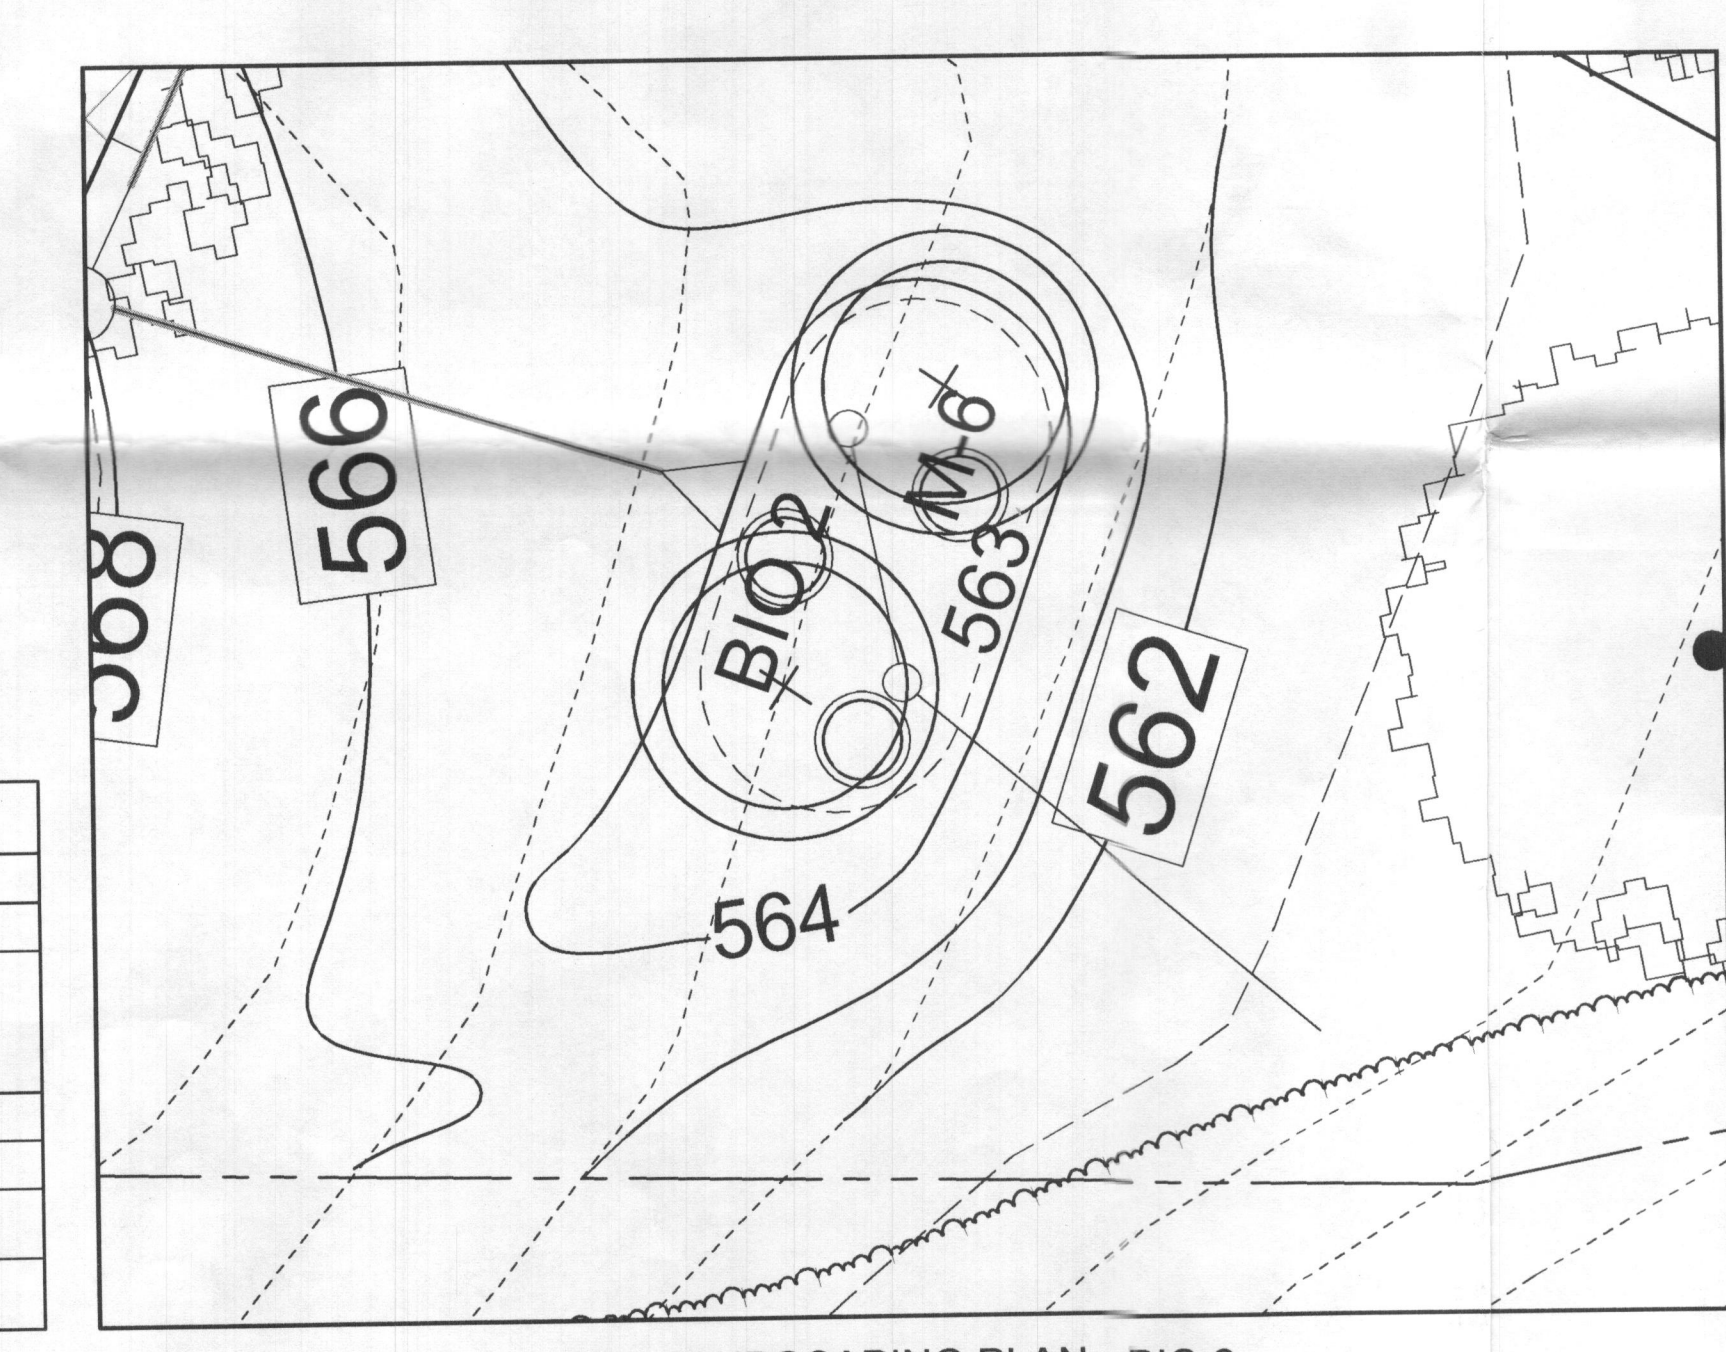

LANDSCAPING PLAN - BIO 2
SCALE: 1"=10'

OWNER/DEVELOPER
 WILLIAMSBURG GROUP
 5485 HARPERS FARM ROAD
 COLUMBIA, MARYLAND 21044

PLOT PLAN
 MELCHIOR PROPERTY
 LOT 6
 TAX MAP 10 GRID 13
 3RD ELECTION DISTRICT
 PARCEL 184
 HOWARD COUNTY, MARYLAND

SILL ENGINEERING GROUP, LLC
 11130 Dovecot Court, Suite 200
 Marriottsville, Maryland 21104
 Phone: 410.325.5176
 Fax: 410.696.2122
 Email: info@sillengineering.com
 Civil Engineering for Land Development

DESIGN BY: PS
 DRAWN BY: AEA
 CHECKED BY: PS
 SCALE: AS SHOWN
 DATE: JULY 23, 2015
 PROJECT #: 15-023
 SHEET #: 1 of 1

ENGINEERS CERTIFICATE
 I CERTIFY THAT THIS PLAN FOR SEDIMENT AND EROSION CONTROL REPRESENTS A PRACTICAL AND WORKABLE PLAN BASED ON MY PERSONAL KNOWLEDGE OF THE SITE CONDITIONS AND THAT IT WAS PREPARED IN ACCORDANCE WITH THE REQUIREMENTS OF THE HOWARD SOIL CONSERVATION DISTRICT.

DEVELOPER'S CERTIFICATE
 I/WE CERTIFY THAT ALL DEVELOPMENT AND CONSTRUCTION WILL BE DONE ACCORDING TO THIS PLAN FOR SEDIMENT AND EROSION CONTROL, AND THAT ALL RESPONSIBLE PERSONNEL INVOLVED IN THE CONSTRUCTION PROJECT WILL HAVE A CERTIFICATE OF ATTENDANCE AT A DEPARTMENT OF THE ENVIRONMENT APPROVED TRAINING PROGRAM FOR THE CONTROL OF SEDIMENT AND EROSION BEFORE BEGINNING THE PROJECT. I ALSO AUTHORIZE PERIODIC ON-SITE INSPECTION BY THE HOWARD SOIL CONSERVATION DISTRICT.

SIGNATURE OF ENGINEER: PAUL M. SILL, P.E.
 DATE: _____
 SIGNATURE OF DEVELOPER: _____
 DATE: _____