

Tax ID - 05-372046 *file*

1/29/74  
*cont. met*  
*app. done*

# PERMIT

SEWAGE DISPOSAL SYSTEM

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY

ELLICOTT CITY

DISTRICT 5

## INDEXED

DATE 4/17/64

P 08303  
A 08249  
A 43076-B

Elwood Scaggs IS PERMITTED TO INSTALL ALTER  X

ADDRESS RFD Laurel, Maryland PHONE \_\_\_\_\_

A SEWAGE DISPOSAL-SYSTEM LOCATED AT \_\_\_\_\_

2 miles south of Highland, Maryland

SUBDIVISION \_\_\_\_\_ ROAD 13886 Clarksville Pike LOT \_\_\_\_\_

PROPERTY OWNER Wiesinger, Lawrence

ADDRESS Highland, Maryland RFD

SPECIFICATIONS to alter and correct situation

DRAIN FIELD \_\_\_\_\_ DEPTH \_\_\_\_\_ FEET, BOTTOM AREA \_\_\_\_\_ SQ. FT.

SEEPAGE PITS \_\_\_\_\_ ABSORBENT SIDE-WALL AREA \_\_\_\_\_ SQ. FT.

SEPTIC TANK CAPACITY \_\_\_\_\_ GALLONS

FOR GARBAGE GRINDER, INCREASE DISPOSAL AREA 22% & TANK CAPACITY 50%.

OTHER Replacement of septic tank and ~~drywell~~ <sup>leaching bed</sup> at least 300 sq. ft.

This ground failed the percolation test but Mr. Wiesinger, is going to install system in unsatisfactory ground anyway. Do not approve this system.

PLANS APPROVED BY Raymond Hodges DATE 4/17/64

FILL SEPTIC TANK AND DISTRIBUTION BOX WITH WATER BEFORE CALLING FOR AN INSPECTION. COVER NO WORK UNTIL INSPECTED AND APPROVED.


NEITHER THE HOWARD COUNTY COMMISSIONERS NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM.

*1/29/74 - new tent (concrete) - out of tent - leaching bed, - off bed on several hrs <sup>per</sup> services  
no sewage overflow noticed. <sup>ADW</sup>*

BLDG. PERMIT SIGNED  
AND RETURNED 2/25/91

*Serial # 36569  
additional - Garages studied -  
work shop.*

A 43076-B  
08249

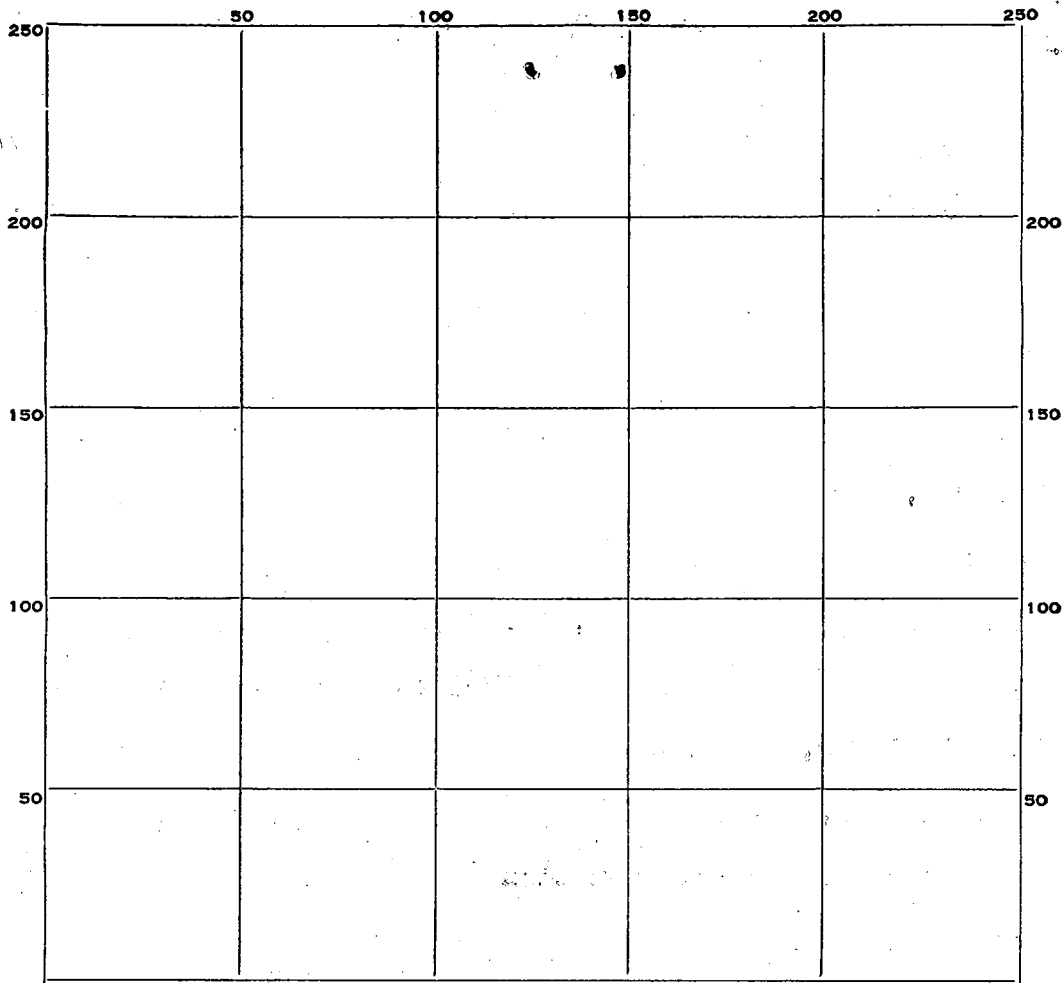

INDICATE NORTH. - NAME ADJOINING ROADWAY AS BASE LINE.

PERMIT CARD \_\_\_\_\_

SEPTIC TANK, LEVEL \_\_\_\_\_ CLEANOUTS \_\_\_\_\_

DISTRIBUTION BOX, LEVEL \_\_\_\_\_

TILE FIELD, DEPTH \_\_\_\_\_ FT. TRENCH WIDTH \_\_\_\_\_ FT.

GRAVEL DEPTH \_\_\_\_\_ IN. TOTAL LENGTH \_\_\_\_\_ FT.

NUMBER OF TRENCHES \_\_\_\_\_ TOTAL BOTTOM AREA \_\_\_\_\_

SEEPAGE PITS, INSIDE DIAMETER \_\_\_\_\_ FT. DEPTH BELOW INLET \_\_\_\_\_ FT.

ABSORBENT AREA \_\_\_\_\_ SQ. FT.

REMARKS \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

DATE SYSTEM APPROVED \_\_\_\_\_ INSPECTOR \_\_\_\_\_

# APPLICATION

A 08249

SEWAGE DISPOSAL TESTING

P \_\_\_\_\_

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY

ELLICOTT CITY

DISTRICT 5

DATE 4/6/64

TO: THE COUNTY HEALTH OFFICER  
ELLICOTT CITY, MARYLAND

I, HEREBY, APPLY FOR THE NECESSARY TESTS IN ORDER TO CONSTRUCT (OR RECONSTRUCT) A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER Lawrence Wiesninger

ADDRESS Highland, Maryland PHONE \_\_\_\_\_

PROPERTY LOCATION:

SUBDIVISION \_\_\_\_\_ LOT NO. \_\_\_\_\_

ROAD AND DESCRIPTION Rt. 108 - turn just before Wayne Right Rd. - sign says

"Dellwood" turn in this lane.  
1.1 mile south of Highland on West side of  
Rt 108

OCCUPANT \_\_\_\_\_ PHONE \_\_\_\_\_

PERSON TO CONSTRUCT SYSTEM \_\_\_\_\_

ADDRESS \_\_\_\_\_ PHONE \_\_\_\_\_

SIZE OF LOT over 1 acre TYPE BLDG. 3

NUMBER OF BEDROOMS

IF NOT SINGLE RESIDENCE DESCRIBE \_\_\_\_\_

SIGNATURE OF APPLICANT David Seaggs

APPROVED BY \_\_\_\_\_ FOR \_\_\_\_\_ DATE \_\_\_\_\_

(KIND OF SYSTEM)


REJECTED BY \_\_\_\_\_ FOR \_\_\_\_\_ DATE \_\_\_\_\_

(KIND OF SYSTEM)

HOLD PENDING FURTHER TESTS ZH DATE April 64

REASONS FOR REJECTION OR HOLDING Either letter pipe or underground water

# THIS IS NOT A PERMIT

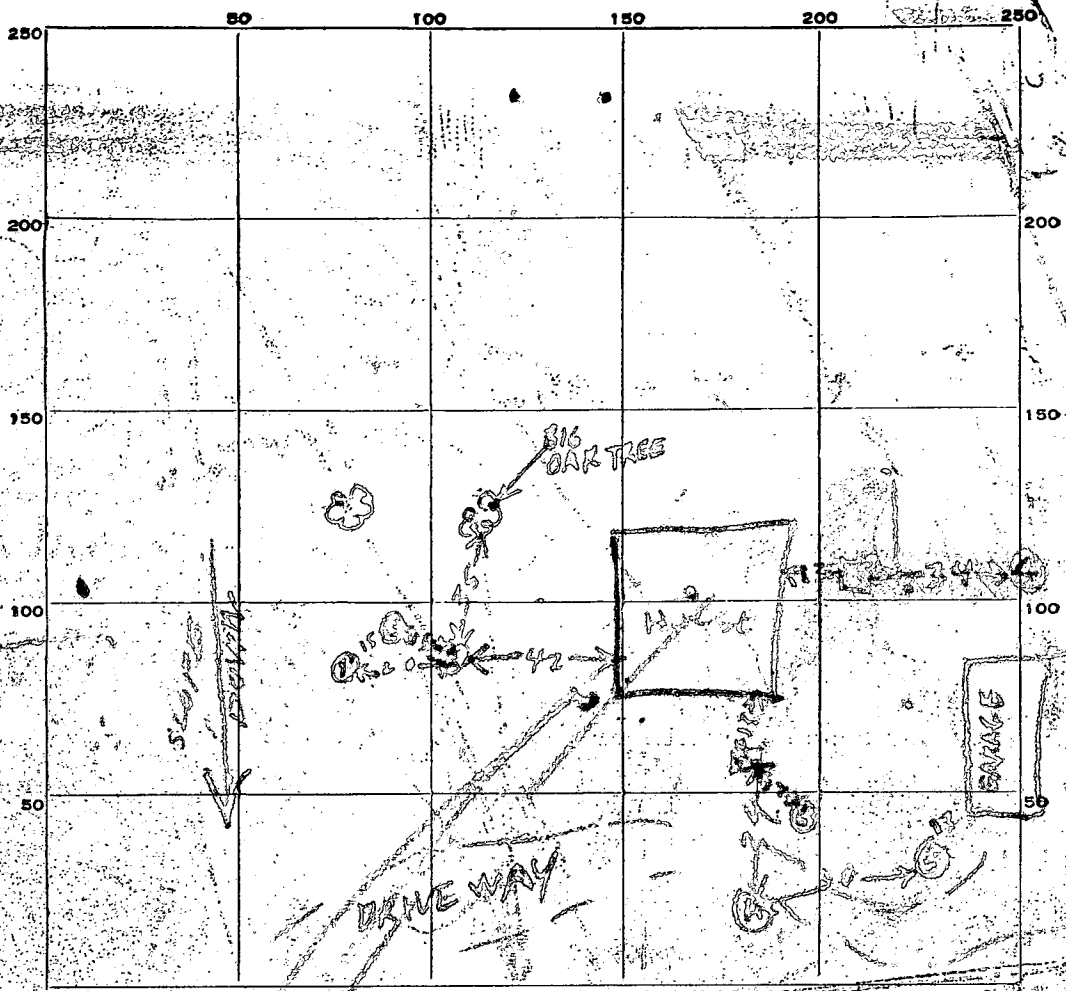

DATE	TEST NO.	DEPTH	PRE-WET		TEST - 1" DROP		TIME
			START	STOP	START	STOP	
4/11/44	1	3	1:17	2:36			little more
"	2	3 1/2	1:53	2:35			little more
"	3	7					5 ft clay below sand
"	4	9					UNDERGROUND WATER 5 ft from grade
"	5	3	2:34	3:25	3:10	3:35	branch
"	5	3	3:53	3:55			branch

SOIL AUGER FINDING

TESTED BY

REMARKS

ALSO PRESENT

LOT NO.

*Handwritten notes:*  
 1. 11/7  
 2. 1:53  
 3. 2:34  
 4. 3:53  
 5. 3:55  
 6. 3:10  
 7. 3:35  
 8. 5 ft clay below sand  
 9. UNDERGROUND WATER 5 ft from grade  
 10. UNDERGROUND WATER 7 ft from grade  
 11. branch  
 12. branch  
 13. 1944's residential  
 14. old shell works & tank

# APPLICATION

A 08249

SEWAGE DISPOSAL TESTING

P \_\_\_\_\_

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY

ELLICOTT CITY

DISTRICT 5

DATE 4/6/64

TO: THE COUNTY HEALTH OFFICER,  
ELLICOTT CITY, MARYLAND

I HEREBY APPLY FOR THE NECESSARY TESTS IN ORDER TO CONSTRUCT (OR RECONSTRUCT) A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER Lawrence Wiesninger

ADDRESS Highland, Maryland

PHONE \_\_\_\_\_

PROPERTY LOCATION:

SUBDIVISION \_\_\_\_\_

LOT NO. \_\_\_\_\_

ROAD AND DESCRIPTION Rt. 108 - turn just before Wayne Right Rd. - sign says "Dellwood" turn in this lane.

1.1 mile south of Highland on West side of

OCCUPANT \_\_\_\_\_

PHONE \_\_\_\_\_

PERSON TO CONSTRUCT SYSTEM \_\_\_\_\_

ADDRESS \_\_\_\_\_

PHONE \_\_\_\_\_

SIZE OF LOT over 1 acre

TYPE BLDG. \_\_\_\_\_

NUMBER OF BEDROOMS 3

IF NOT SINGLE RESIDENCE DESCRIBE \_\_\_\_\_

SIGNATURE OF APPLICANT David Seays

APPROVED BY \_\_\_\_\_

FOR \_\_\_\_\_

DATE \_\_\_\_\_

(KIND OF SYSTEM)

REJECTED BY \_\_\_\_\_

FOR \_\_\_\_\_

DATE \_\_\_\_\_

(KIND OF SYSTEM)

HOLD PENDING FURTHER TESTS PH

DATE \_\_\_\_\_

REASONS FOR REJECTION OR HOLDING test will be performed in August 1964

## THIS IS NOT A PERMIT



WHITE PIPE

WHITE PIPE or LARGE ARROW 1012  
SLATED STONE - WHITE PAINT

WHITE PIPE

WHITE PIPE

NOT AROUND WHITE MARKER

NO SCALE

2/12/91 Owner

Proposes a toilet & shower in new garage; art studio not for professional use, paints to be water-based

Recommend consideration of plumbing demands of studio.

PER OWNER, SEPTIC SIZED FOR 5 OR 6 BR HOUSE  
NO FAILURE SEEN D/W VICINITY

SPRING

Existing Garage  
New Garage/Studio


SPRING

TRAIL PILE ON ROAD

← WASHINGTON

Route 19 - Columbia Pike  
Route 108 - Clarksville Pike

Re Survey - July 16, 1957 - by Rube Fullum & Larry Wiesner

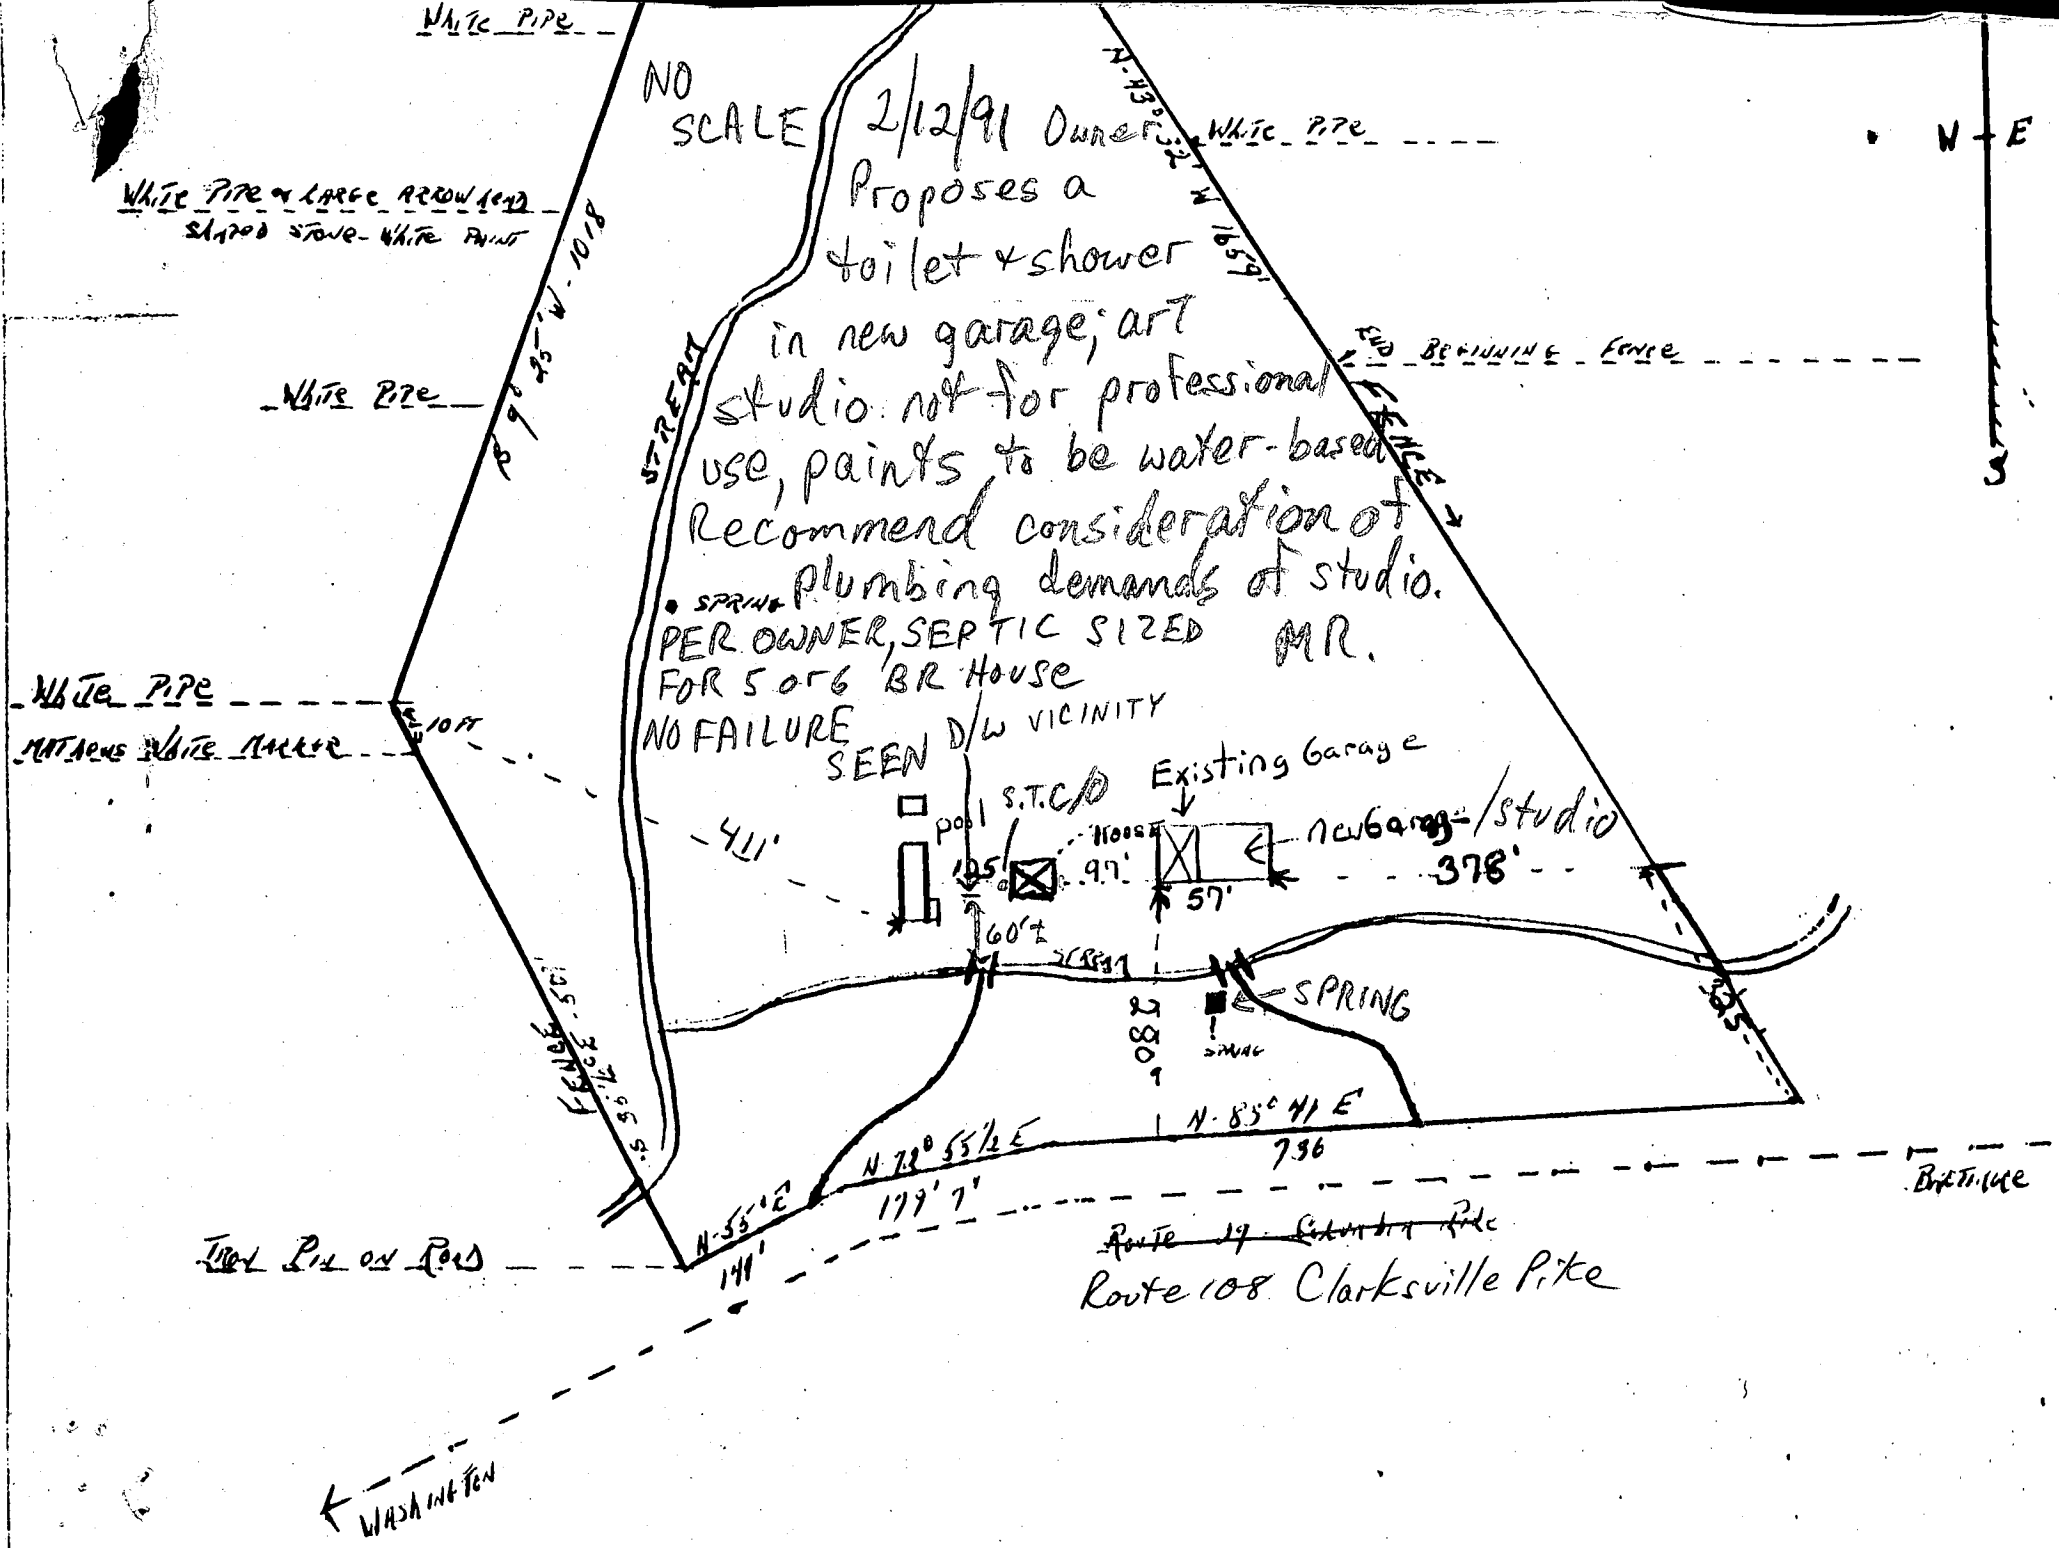



---

**HOWARD COUNTY HEALTH DEPARTMENT**

---

*Joyce M. Boyd, M.D., County Health Officer*

*Reply to:*

February 22, 1991

Mr. Larry Weisinger  
13886 Clarksville Pike  
Highland, Maryland 20777

RE: B. P. #36569  
Proposed Garage/Studio Addition  
13886 Clarksville Pike

Dear Mr. Weisinger:

This is to advise that the above referenced building permit application cannot be recommended for approval at this time due to an unsatisfactory water supply and insufficient septic system capacity.

A site inspection to determine the location and condition of the well and septic system was conducted February 12, 1991. During that inspection, it was clarified that the proposal included the addition of plumbing (toilet, sink, shower) for the studio. The water supply was observed to be a spring of unapproved construction. At that time, you indicated that you believed the property was served by a septic system sufficient for a five or six bedroom house although our records (copy enclosed) show that a septic system installation was not approved for this property due to unsatisfactory soil conditions.

According to the provisions of Maryland Sewage Disposal Regulation (COMAR 26.04.02.02D): "A person may not construct or alter any residence... served by an on-site sewage disposal system or private water supply system, and a county may not issue a building permit for the desired new construction or alteration, until the Approving Authority has: Certified the existing on-site sewage disposal and water supply systems as capable of handling any reasonable foreseeable increase in sewage flows or water demand."

Mr. Larry Weisinger

- 2 -

February 22, 1991

In order for this building permit to be recommended for approval, a satisfactory septic system repair inspection would be required.

The septic repair permit fee is \$10; the services of a backhoe would be required to conduct excavations as necessary to determine the size and condition of the septic system as well as to allow examination of the soils (percolation test) in which the system is installed. If the site or condition of the system is not judged sufficient, then an upgrade (soil conditions permitting) would be necessary.

To obtain the septic repair permit and schedule the inspection or to discuss any aspect of this matter, please contact this office at 461-9933.

Yours truly,



Craig Williams, Director  
Water and Sewerage Program


CW:hs

Enclosure

cc: Avis Corbin  
Cochran Home Improvements

---

PER THE ATTACHED MEMO (FEB 25, 1991)  
FROM COCHRAN HOME IMPROVEMENTS,  
REVISED BUILDING PERMIT APPLICATION IS  
RECOMMENDED FOR APPROVAL.  
REVISION REFLECTS NO PLUMBING, NO INCREASE  
IN LIVING AREA; THEREFORE NO IMPACT  
ON SEPTIC SYSTEM.

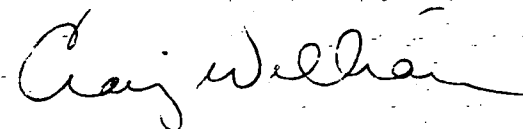2/25/91 

COCHRAN HOME IMPROVEMENTS  
14661 Mustang Path  
Glenwood MD 21738  
M.H.I.C. 19492

February 25, 1991

Mr. Craig Williams, Program Director  
Howard County Health Department  
Court House Square  
3525 Ellicott Mills Drive  
Ellicott City, MD 21043

RE: Wiesinger Building Permit  
Dated 2/7/91, Permit No. 36569

Dear Mr. Williams:

I have discussed your department's position to the addition of a bathroom facility in the above-referenced proposed two-car garage. Mr. and Mrs. Wiesinger have agreed to eliminate the bathroom from this project. The garage will be car and storage space only. Also, in reference to the space mentioned as art and work studio, this space is intended as a multi-purpose room used as a work shop/storage area and art studio.

Your cooperation and assistance in this matter is greatly appreciated. If there is any further information you may need, please do not hesitate to contact me.

Very truly yours,

John Cochran  
COCHRAN HOME IMPROVEMENTS  
14661 Mustang Path  
Glenwood, Maryland 21738  
301-489-5111

JC:d1c

---

ACCEPTABLE AS REVISED -  
2/25/91 *Craig Williams*  
HOWARD COUNTY HEALTH,

Howard County Health Department

To: PERMITS OFFICE / INSPECTIONS OFFICE

BP 36569 - WEISINGER  
13886 CLARKSVILLE PIKE

APPROVED AS PER 2/25 REVISION.

PLUMBING NOT PERMITTED

DUE TO INSUFFICIENT  
SEPTIC CAPACITY.

From:

Craig Wilkins

Date:

2/25/91

HD-170


9/19/95  
9:30

SITE INSPECTION SHEET

OWNER: MARYLYN Lawrence Wiesinger  
PHONE #: 410 531-2846  
SITE ADDRESS: 13886 Clarksville Pike

DATE REQUESTED: 9/19/95  
CONTRACTOR: \_\_\_\_\_  
WELL TAG #: 40-94-0678  
COUNTY #: \_\_\_\_\_

PROPOSAL: Spring going dry, replacement well requested

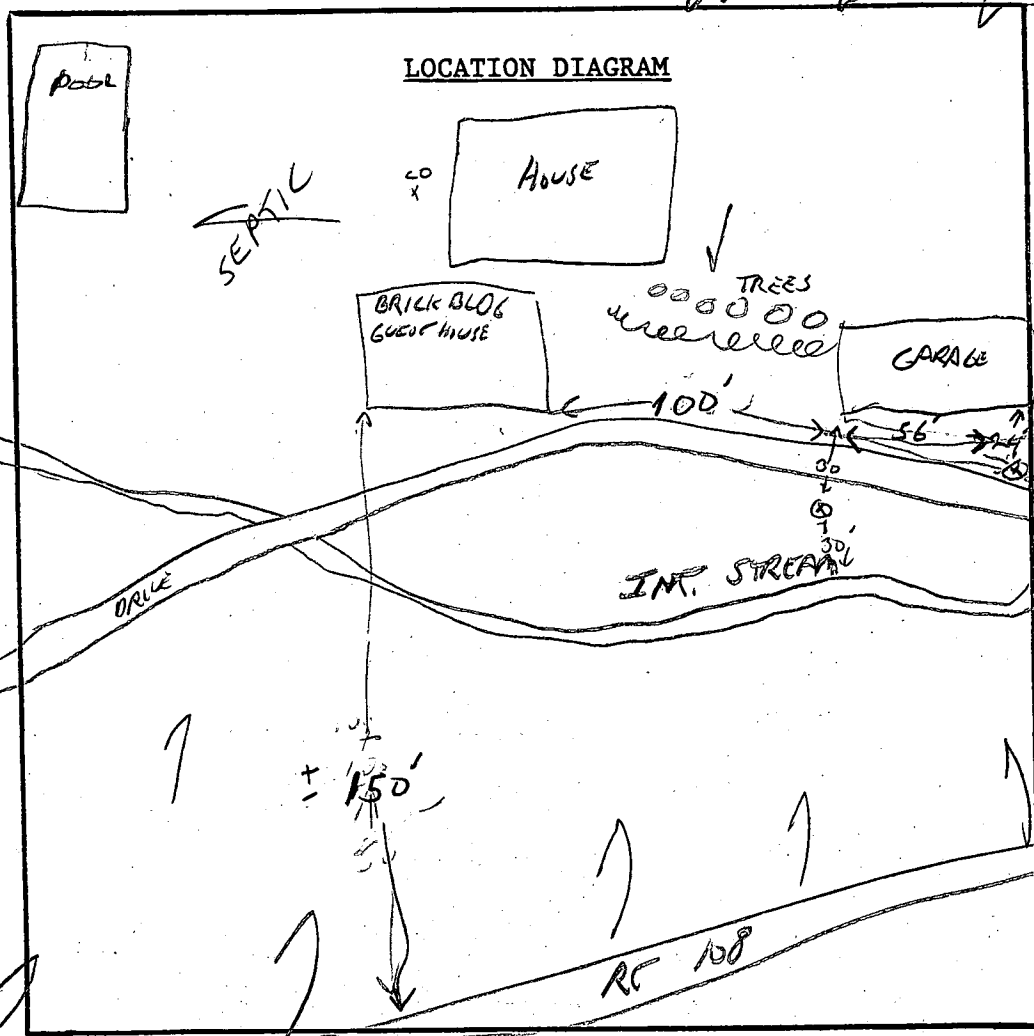

COMMENTS: SPRING TO BE ABANDONED, HOWEVER  
WILL REQUEST KEEPING IT FOR NON-POTABLE USE.

DATE: 9-19-95 INSPECTOR: J. [Signature]



