

9/2/99 2 PM
401
9/8/99
Have done
anytime

PERMIT

SEWAGE DISPOSAL SYSTEM

DEPARTMENT OF HEALTH AND MENTAL HYGIENE

P 512012
A 48734

DISTRICT _____

HOWARD COUNTY HEALTH DEPARTMENT
BUREAU OF ENVIRONMENTAL HEALTH
~~XXXXXX~~ 410-313-2640

DATE 7-19-99

INDEXED

DATE SYSTEM APPROVED 9/8/99

INSPECTOR S.R.K.

South Carroll Backhoe IS PERMITTED TO INSTALL ALTER

ADDRESS 4410 Salem Bottom Road, Westminster, MD 21157 PHONE 410-875-4197

SUBDIVISION West Friendship Estates LOT 94 ROAD 3313 Fox Valley Drive

PROPERTY OWNER Altieri Homes

ADDRESS _____

SEPTIC TANK CAPACITY 1250 GALLONS

NUMBER OF BEDROOMS 4

180 SQUARE FEET PER BEDROOM

LINEAR FEET OF TRENCH REQUIRED 180

REPLACE WITH
5 Y SYSTEM APPROVED
11/3/99
CW

TRENCHES - Trench to be 2 feet wide. Inlet 3.0 feet below original grade. Bottom maximum depth 7.0 feet below original grade. Effective area begins at 3.0 feet below original grade. 4.0 feet of stone below distribution pipe.

LOCATION - Begin trenches 170 feet up the left 302.31' lot line and 10 feet off that same lot line as seen when facing the lot from Fox Valley Drive. Run trenches on contour toward the rear lot line.

NOTES - No trench to exceed 100 feet in length. Provide 6" - 8" diameter cleanout and cap to grade or above on septic tank. OK 8/5/99 DCS

PLANS APPROVED BY Amy McMillen/C. Williams DATE 07/02/1999

COVER NO WORK UNTIL INSPECTED AND APPROVED

NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM

NOTE: CLEANOUT REQUIRED EVERY 70 FEET OF SEWER LINE AND/OR AT 90° SWEEPS IN LINES FROM HOUSE TO DRAIN FIELDS. 90° ELBOWS NOT ACCEPTABLE.

NOTE: ALL PARTS OF SEPTIC SYSTEMS (I.E. TANK, DISTRIBUTION BOX TRENCHES) TO BE 100 FEET FROM WELL (UNLESS OTHERWISE SPECIFICALLY AUTHORIZED)

NOTE: IF DEEP TRENCH(ES) ARE USED CALL FOR INSPECTION BEFORE AND AFTER PLACING GRAVEL IN TRENCH(ES)

NOTE: NO DRY WELL SHALL EXCEED 15 FOOT IN DIAMETER NO ABSORPTION TRENCH TO EXCEED 100 FEET IN LENGTH

NOTE: ALL PIPE FROM HOUSE TO SEPTIC TANK MUST BE CAST IRON OR SCHEDULE 35/40 PVC OR ABS

PERMIT VOID AFTER TWO YEARS


NOTE: INSTALL STAND PIPE ON SEPTIC TANK AND DRY WELL STAND PIPES MUST BE 6 INCHES IN DIAMETER CAST IRON, CONCRETE OR TERRA COTTA OR PVA OR ABS ACCEPTED. IF TOP OF SEPTIC TANK IS DEEPER THAN 3 FEET, MANHOLE TO GRADE REQUIRED.

NOTE: DISTRIBUTION BOXES MUST HAVE BAFFLES

***INSTALLER IS RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT**

***CALL 461-9933 FOR INSPECTION OF SEPTIC SYSTEM.**

48734

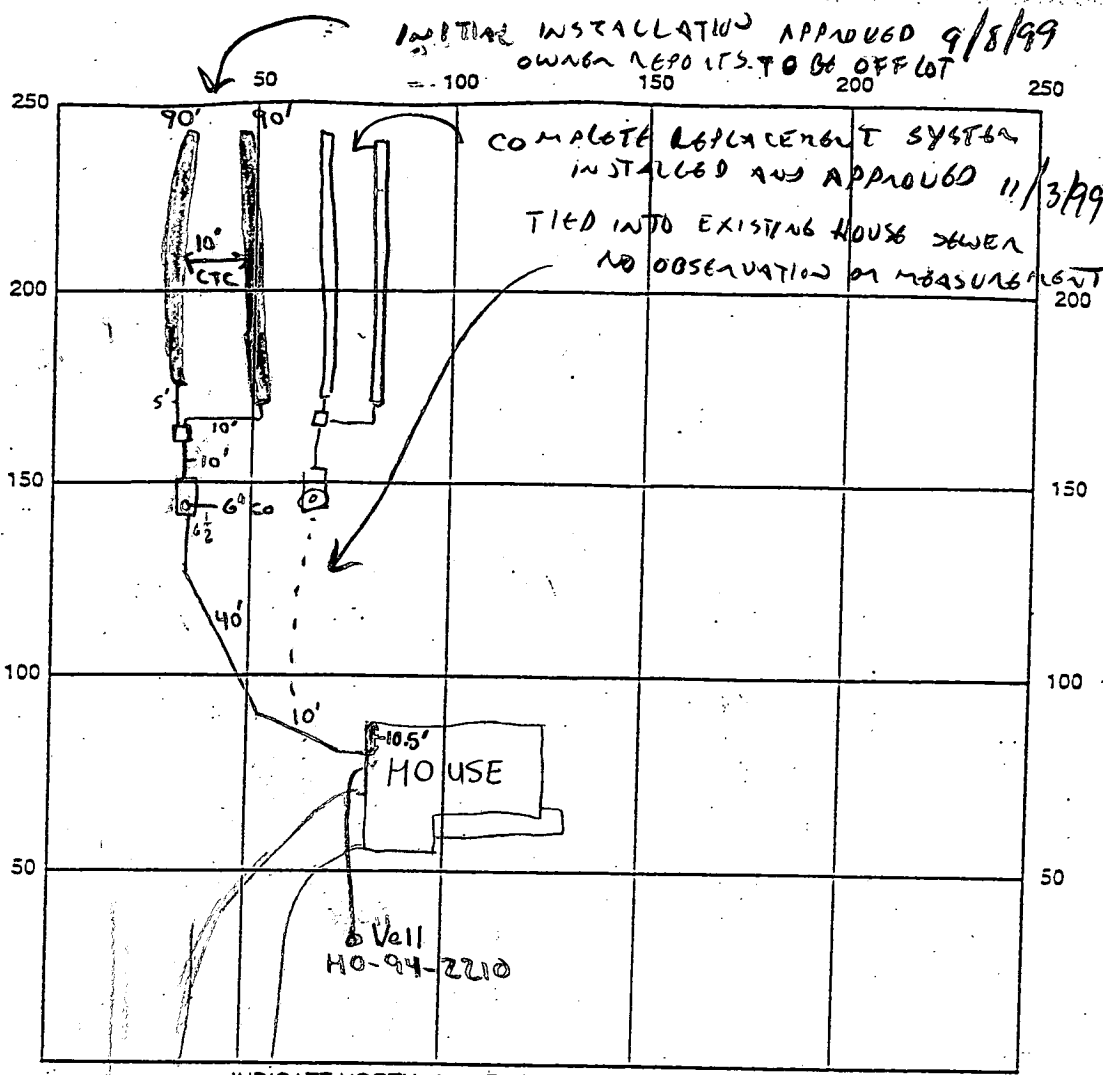

COMPLETE REPLACEMENT SYSTEM
INSTALLED AND APPROVED 11/3/99
TIED INTO EXISTING HOUSE SEWER
NO OBSERVATION OR MEASUREMENT

SEPTIC TANK LEVEL 1500 gallon top seam CLEANOUTS 6" @ Tank + manhole clearance to grade 11/3/99

DISTRIBUTION BOX LEVEL Baffle is in

DRAIN FIELD/TITLE DEPTH 7 FT. TRENCH WIDTH 2 FT. INLET DEPTH 3 FT.

EFFECTIVE GRAVEL DEPTH 4 FT. TOTAL LENGTH 180 FT.

NUMBER OF TRENCHES 2 ONE SIDEWALL/BOTTOM AREA 720 SQ. FT.

DRYWALL INSIDE DIAMETER N/A FT. EFFECTIVE DEPTH BELOW INLET N/A FT.

ABSORBENT AREA N/A SQ. FT.

REMARKS: 8/3/99 - WPI OK - (SRK) 9/2/99 - OK TO CONTINUE WORK, PLUMBER NEEDS TO RAISE SEWER ABOUT 3' FOR HOUSE CONNECTION - (SRK) 9/8/99 - HOUSE CONNECTION CONFIRMED TO BE MADE - (SRK)

11/3/99 AFTER DISCOVERING MOST OR ALL OF SYSTEM INSTALLED OFF LOT.

IDENTICAL SYSTEM INSTALLED ON LOT, ORIGINAL SYSTEM INCLUDING GRAVEL & PIPELINE REMOVED. MARKS LEFT @ DIST. BOX + END OF UPPER TRENCH, TO BE SURVEYED PRIOR TO FINAL APPROVAL. (CW)

DATE SYSTEM APPROVED 9/8/99 INSPECTOR Steven R. King

REPLACE NEW SYSTEM APPROVED 11/3/99 - CW

REGION _____

AREA _____ RATING _____

ACKNOWLEDGMENT AND CONTROLS	DATE

Howard County Department of Health
 BUREAU OF ENVIRONMENTAL HEALTH
RECORD OF INVESTIGATION

DISPOSITION	DATE

LOCATION West Friendship Lot 94 ZIP 21794

OWNER Greg Nero ADDRESS 3313 Fox Valley Drive PHONE 410 480 1893

OCCUPANT " " ADDRESS " " PHONE " "

COMPLAINANT " " ADDRESS " " PHONE " "

REASON FOR INVESTIGATION Owner complains that his septic tank is off his lot and on his neighbor's lot, claims he has had his lot surveyed. Would like to know what can be done. CODES _____

RECEIVED BY Steven R. Krieg DATE 10/25/99 ASSIGNED TO _____ DATE _____


DATE OF INVESTIGATION 10/26/99 TIME 5:00 WEATHER _____

REPORT TALKED TO OWNER BY PHONE. HE INDICATES HE AND BUILDER AGREE THAT SEPTIC TANK AND UPPER TRENCH ARE OVER THE LOT LINE & THEY WILL HAVE CONTRACTOR CONTACT HEALTH DEPT FOR INSPECTION (CURRENT PERMIT STILL APPLIES). PLAN TO DISCONNECT OFF LOT TRENCH & LEAVE "IN-SITU" IF ADJOINING PROPERTY OWNER IS AGREEABLE. TRENCH APPEARS TO BE AT OR BELOW LOWEST EDGE OF THAT LOT'S SEPTIC AREA, SO NO IMPACT TO CONSEQUENCE TO THAT LOT'S SEPTIC CAPACITY. (10)

RESOLVED - COMPLETE REPLACEMENT SYSTEM INSTALLED 11/3/99

DATE SUBMITTED 11/3/99 SANITARIAN G. Wilber

Lot 94 West FRIENDSHIP EST.
3313 Fox Valley DR.

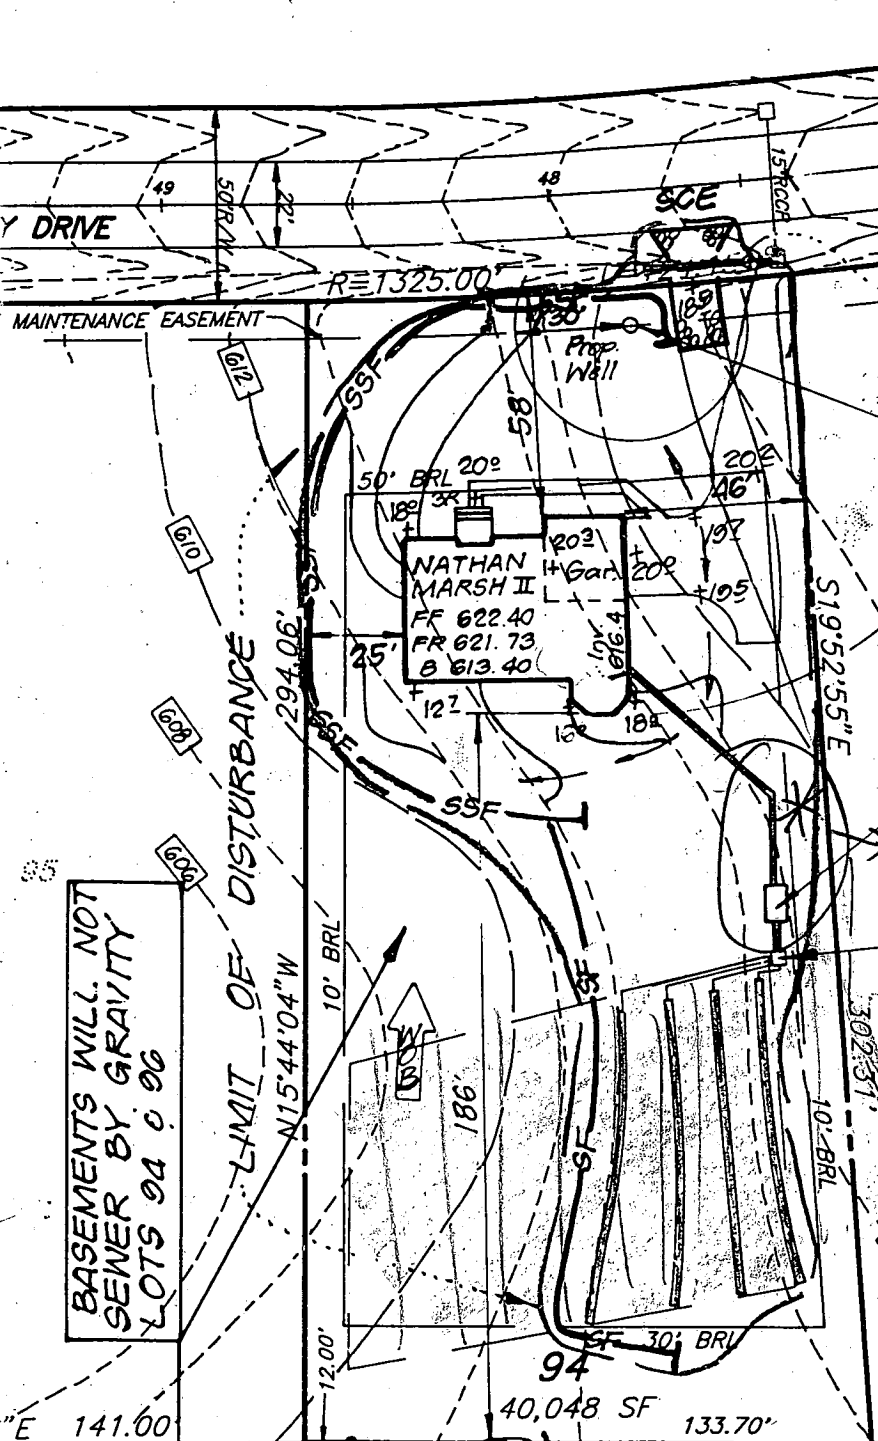

20LF 9x14" Driveway
Culvert plus End Sections,
set Invert 17' below
Approved Septic System Plan
Howard County Health Department
B00118360 SED-4BR

C. Willer 7/6/99
Signature Date

1250 Gal. Septic Tank
Grd. @ Tank 617.8
Inv. In 615.0
Inv. Out 614.7

PREFER SEPTIC TANK BE INSTALLED
BEFORE BEND. (CW)
Distribution Box Stone
Ex. Grd. 617.5
Inv. 616.5

Total linear feet of trench
required 180 feet

Width of trench (ee) 2 feet

WLET @ 3' N 526500 feet

Depth of stone required below
distribution pipe 4 feet

BASEMENTS WILL NOT
SEWER BY GRAVITY
LOTS 94 & 96

LIMIT OF DISTURBANCE

Distribution Box

APPLICATION

PERCOLATION TESTING

A 48734
P _____

HOWARD COUNTY HEALTH DEPARTMENT
BUREAU OF ENVIRONMENTAL HEALTH
PO BOX 476 ELLICOTT CITY, MARYLAND 21043
TELEPHONE, 461-9933

DISTRICT _____
DATE 12/8/92

TO: THE COUNTY HEALTH OFFICER
ELLICOTT CITY, MARYLAND

I, HEREBY, APPLY FOR THE NECESSARY TEST IN ORDER TO CONSTRUCT (OR RECONSTRUCT) A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER West Friendship New Town Co. Alticki HOMES

ADDRESS c/o Land Design & Development PHONE (410) 740-2100
10805 Hickory Ridge Road, Columbia, MD 21044

PROSPECTIVE BUYER N/A

ADDRESS _____ PHONE _____

PROPERTY LOCATION:

SUBDIVISION West Friendship Estates LOT NO 94

ROAD AND DESCRIPTION Pfefferkorn Road & Route 32 3313 Fox Valley Drive

SEAL PERMIT SIGNED

TAX MAP 15 PARCEL # 32 & 42, 533

~~NO~~ RETURNED 2-2-99
Serial #570118360

SIZE OF LOT 1 + acres TYPE BLDG single family dwelling - YBm
(SINGLE FAMILY DWELLING OR COMMERCIAL)

THE SYSTEM INSTALLED UNDER THIS APPLICATION IS ACCEPTABLE ONLY UNTIL PUBLIC FACILITIES BECOME AVAILABLE. I FULLY UNDERSTAND THE FEE CONNECTED WITH THE FILING OF THIS PERC TEST APPLICATION IS NON-REFUNDABLE UNDER ANY CIRCUMSTANCES. I ALSO AGREE TO COMPLY WITH ALL M.O.S.H.A. REQUIREMENTS IN TESTING THIS LOT.

Mark S. Reich
(SIGNATURE OF APPLICANT)

APPROVED BY _____ FOR _____ DATE _____

REJECTED BY _____ FOR _____ DATE _____

HOLD PENDING FURTHER TESTS _____ DATE _____


REASONS FOR REJECTION OR HOLDING _____

HD-216

THIS IS NOT A PERMIT

SOIL PROFILE

0

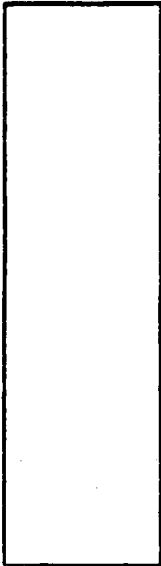

INDICATE NORTH - NAME ADJOINING ROADWAY AS BASE LINE.

DATE	TEST NO.	DEPTH	PRE-WET		TEST - 1" DROP		TIME
			START	STOP	START	STOP	

REMARKS _____

TYPE OF SOIL _____

TESTED BY _____ ALSO PRESENT _____

APPLICATION

PERCOLATION TESTING

A _____

P _____

HOWARD COUNTY HEALTH DEPARTMENT
BUREAU OF ENVIRONMENTAL HEALTH
3525-H ELLICOTT MILLS DRIVE/ELLICOTT CITY, MARYLAND 21043
TELEPHONE: 313-2640

DISTRICT _____

DATE _____

TO: THE COUNTY HEALTH OFFICER
ELLICOTT CITY, MARYLAND

I HEREBY APPLY FOR THE NECESSARY TEST PRIOR TO APPLICATION FOR PERMIT TO CONSTRUCT (OR RECONSTRUCT) A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER _____

ADDRESS _____ PHONE _____

AGENT OR PROSPECTIVE BUYER _____

ADDRESS _____ PHONE _____

PROPERTY LOCATION:

SUBDIVISION _____ LOT NO. _____

ROAD AND DESCRIPTION _____

TAX MAP _____ PARCEL # _____

SIZE OF LOT _____ TYPE BLDG. _____
(SINGLE FAMILY DWELLING OR COMMERCIAL)

THE SYSTEM INSTALLED UNDER THIS APPLICATION IS ACCEPTABLE ONLY UNTIL PUBLIC FACILITIES BECOME AVAILABLE. I FULLY UNDERSTAND THE FEE CONNECTED WITH THE FILING OF THIS PERC TEST APPLICATION IS NON-REFUNDABLE UNDER ANY CIRCUMSTANCES. I ALSO AGREE TO COMPLY WITH ALL M.O.S.H.A. REQUIREMENTS IN TESTING THIS LOT.

(SIGNATURE OF APPLICANT) _____

APPROVED BY _____ FOR _____ DATE _____

DISAPPROVED BY _____ FOR _____ DATE _____

HOLD PENDING FURTHER TESTS _____

REASONS FOR REJECTION OR HOLDING _____

PERCOLATION TEST PLAT/PRELIMINARY PLAT - TITLE OR I.D. # _____ DATE _____

SITE DEVELOPMENT PLAN/FINAL PLAT - TITLE OR I.D. # _____ DATE _____

THIS IS NOT A PERMIT

48734





LOT #47

New #89

COUNTY #


SOIL PROFILE

0'

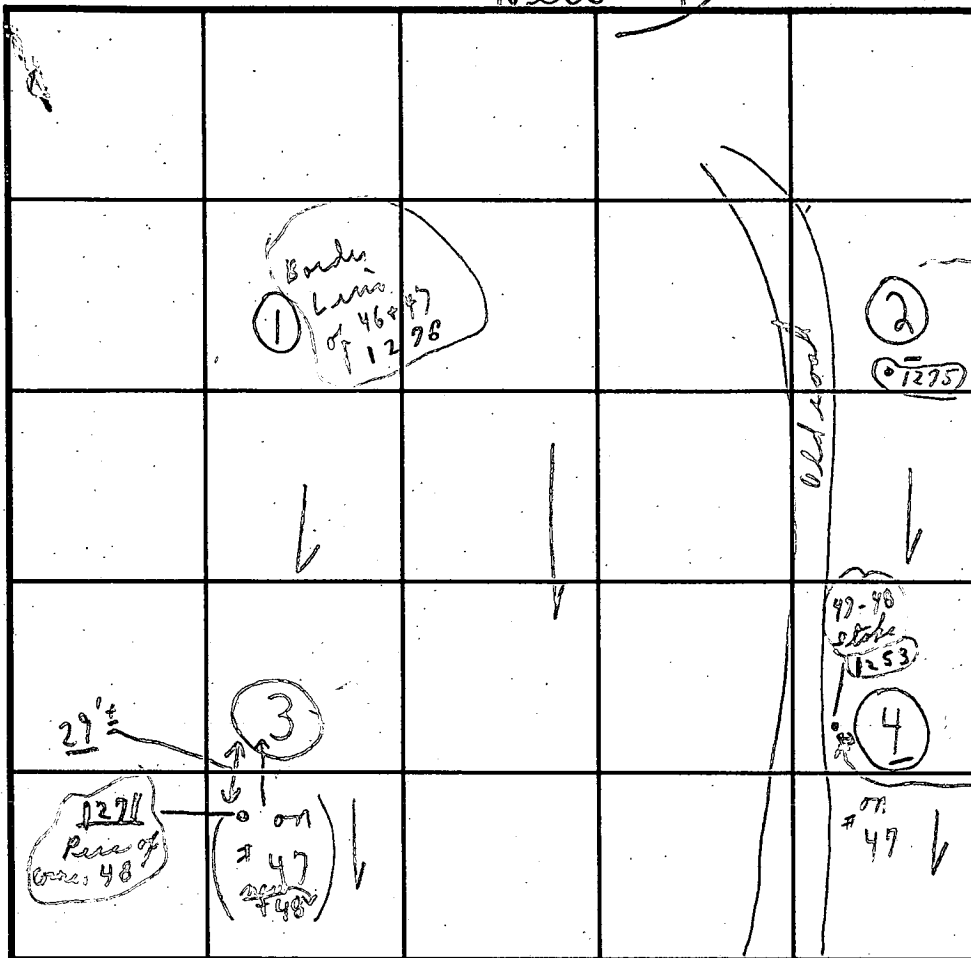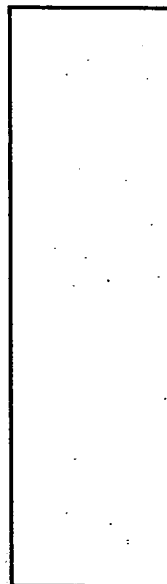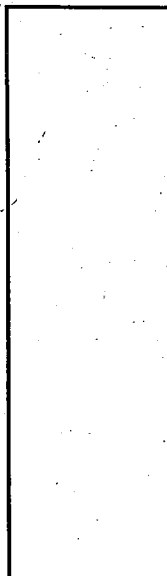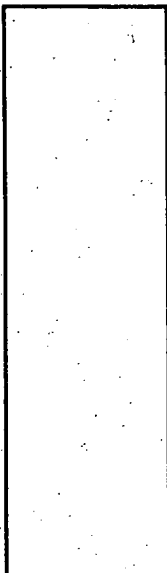

SOIL PROFILE

0'

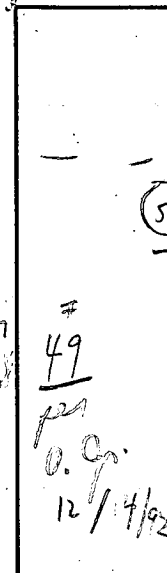

INDICATE NORTH - NAME ADJOINING ROADWAY AS BASE LINE.

Wetherburn Road

DATE	TEST NO.	DEPTH	PRE-WET		TEST - 1" DROP		TIME
			START	STOP	START	STOP	
12/14/92	1276	7'	9:37	9:40	9:40	9:45	5 min
	1	3.5'	9:38	#46		9:39	mud dry
	1275	4.5' / 12.5'	9:42	9:51	9:51	10:07	16 min
	2	13'	9:50	10:00	570	stones	
	min 1271	4 1/2'	10:15	10:17	10:17	10:24	7 min
	3	8' / 11'	10:13	10:15	10:15	10:19	4 min
	#47/48	11 1/2'					
	1253	3 1/2'	10:12	10:17	10:17	10:37	3/4 to 7/8" some corro
	on end of hole	5'-3"	10:50	10:52	10:52	10:55	3 min

REMARKS Tests downhill from #46 pore hole

TYPE OF SOIL loam below dry - shallow not per pore test

TESTED BY C. Red ALSO PRESENT 3' wet head plate

TRENCH DESIGN DATA: AVERAGE PERCOLATION TIME 6 min TRENCH WIDTH 2'

INLET DEPTH 3 MAXIMUM BOTTOM DEPTH 7' SQ. FT./BEDROOM 180 ft²

Howard County Health Department

To: LOT 94 - WEST FRIENDSHIP

READY TO INDEX

(CEHS ALREADY
HAS ICOP INFO
FOR FOLLOW-UP
DO NOT SEND THEM
SEPARATE NOTIFICATION)


DO KEEP ^{THIS NOTE AND ALL} ~~ALL~~ RECORDS WITH
FILE - ONGOING ^{CONCERNS} ~~ISSUE~~
ABOUT SEPTIC SYSTEM
LOCATION AND ABOUT
WATER QUALITY,

From: _____

Date: _____

2/15/00

HD-170

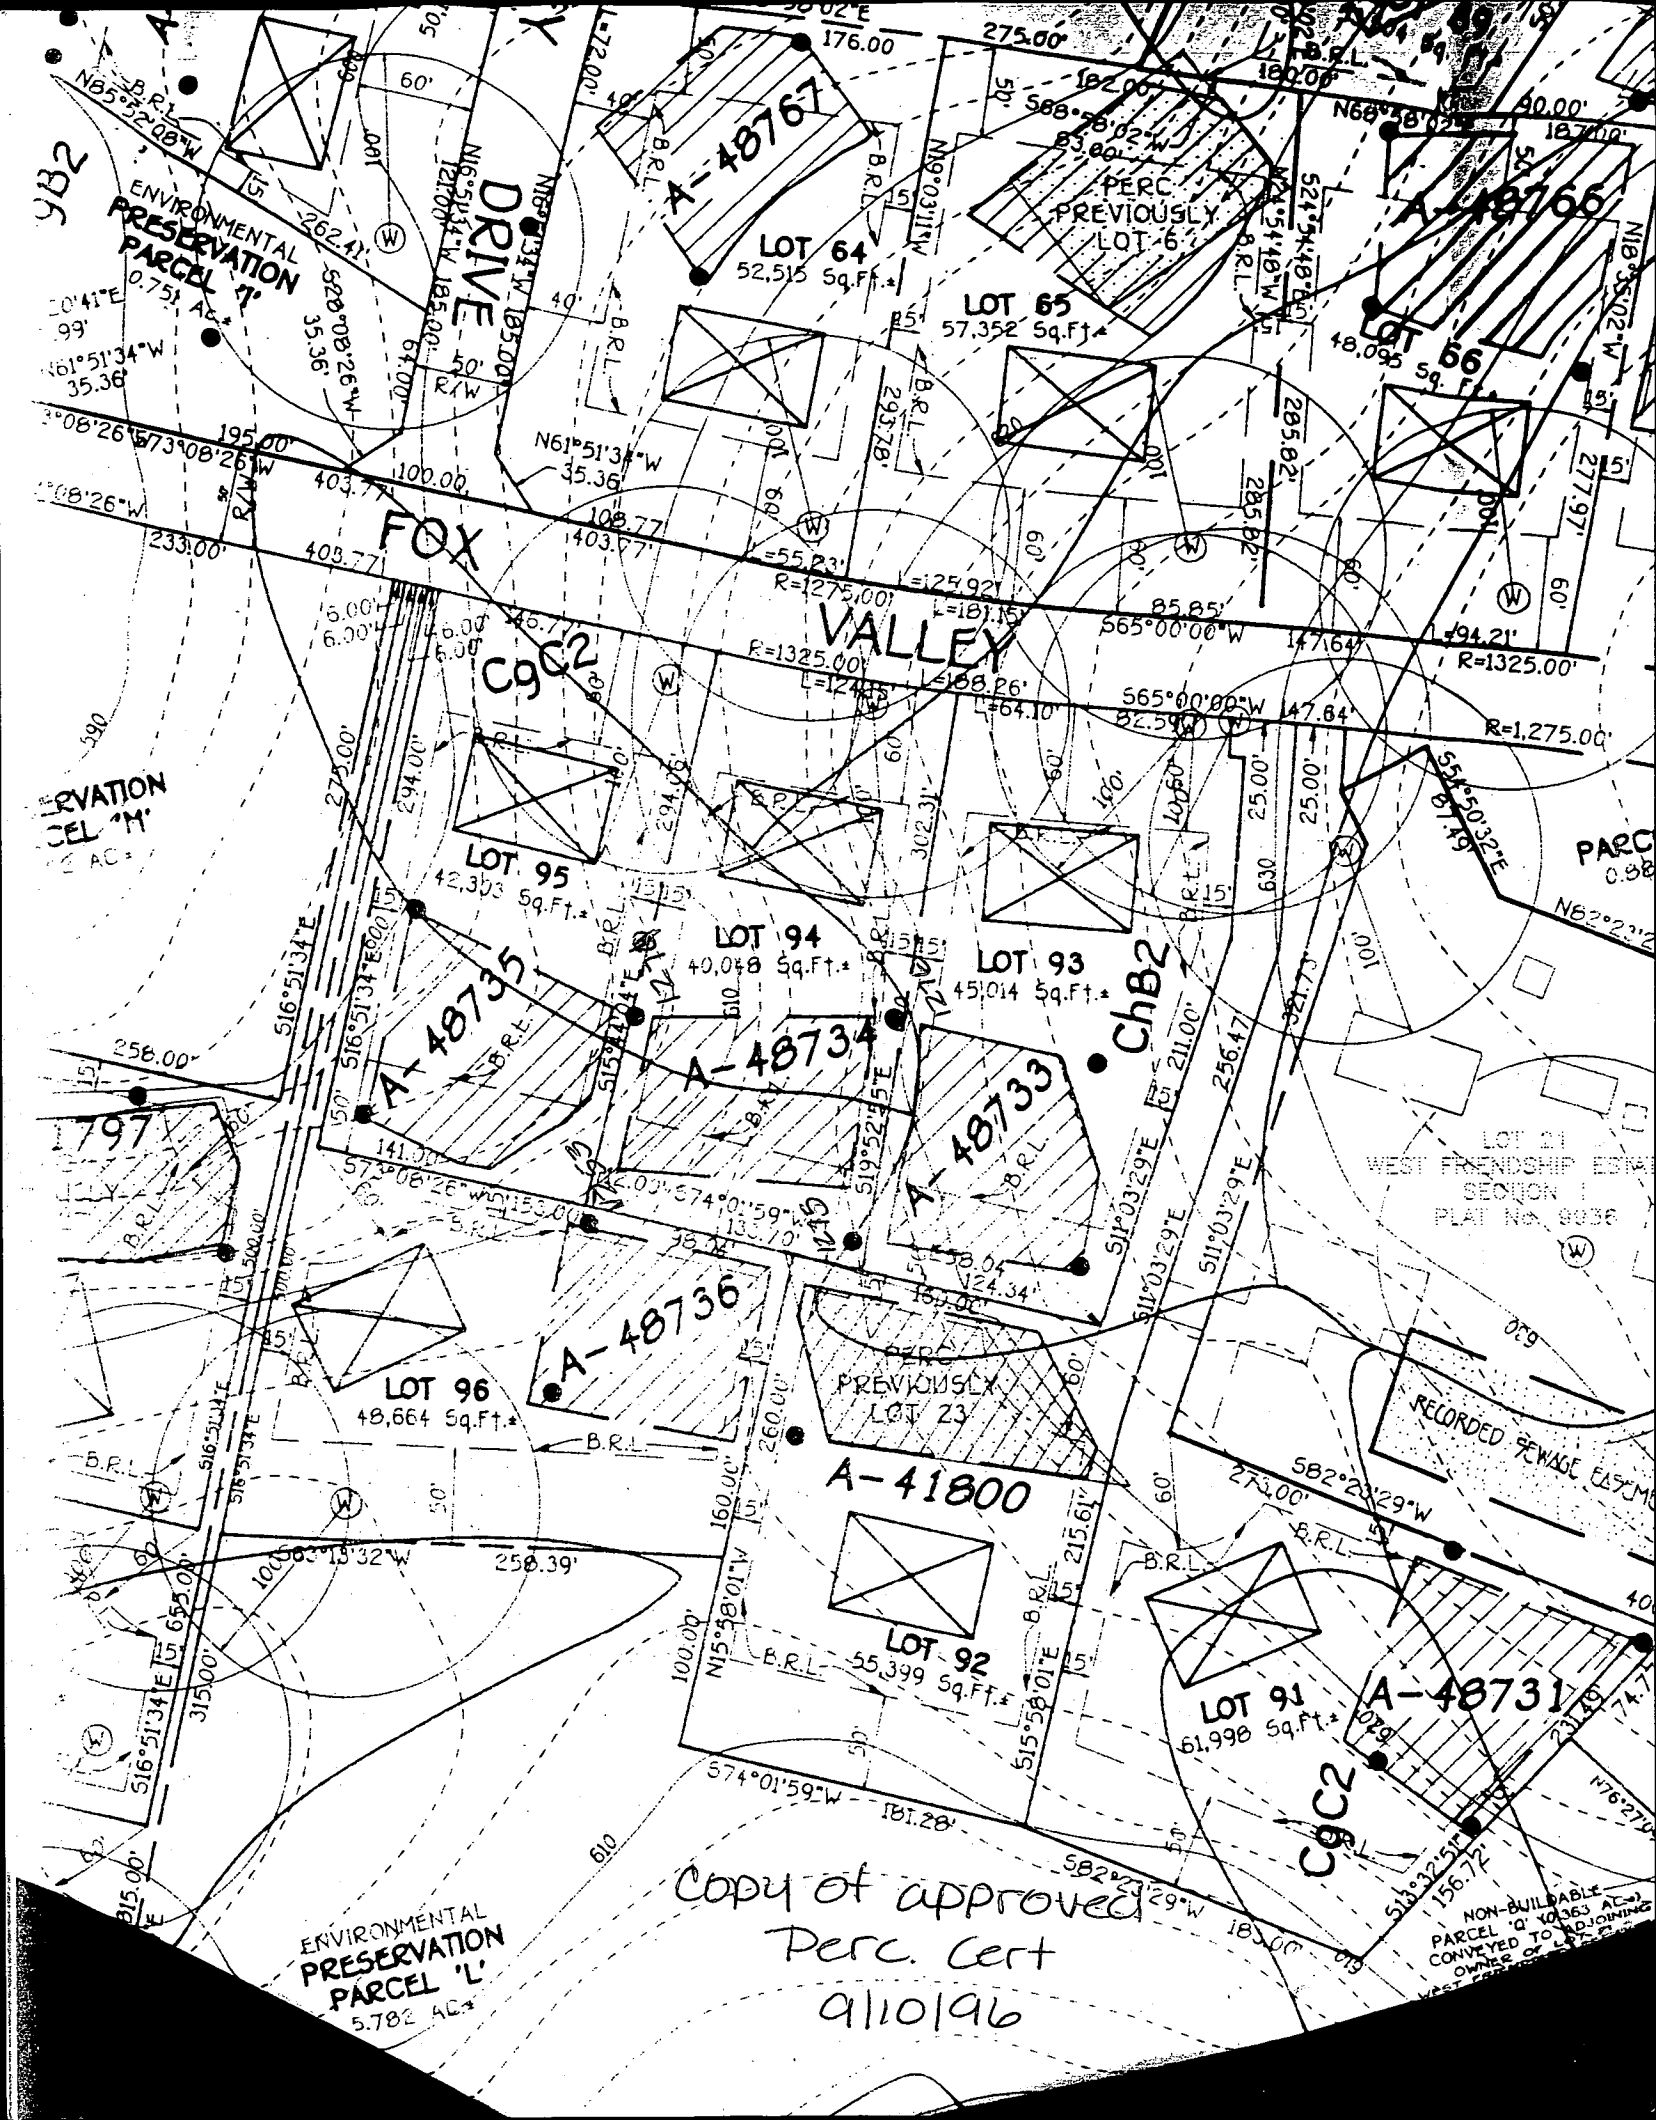

Copy of approved
 Perc. Cert
 9110196

MATCH

LINE

SEE

FOX

VALLEY

10' PUBLIC TREE MAINTENANCE EASEMENT ENCUMBERED BY A PUBLIC STORMWATER MANAGEMENT, DRAINAGE AND UTILITY EASEMENT ENVIRONMENTAL PRESERVATION PARCEL 'M' 1.622 AC. PRESERVATION PARCEL 'M' OWNED AND MAINTAINED BY HOMEOWNER'S ASSOCIATION

LOT 95 42,303 Sq.Ft.
LOT 94 40,048 Sq.Ft.
LOT 93 44,854 Sq.Ft.

LOT 99 61,273 Sq.Ft.

LOT 96 48,664 Sq.Ft.

LOT 92 55,559 Sq.Ft.

LOT 91 61,998 Sq.Ft.

LOT 98 46,116 Sq.Ft.

LOT 97 42,922 Sq.Ft.

ENVIRONMENTAL PRESERVATION PARCEL 'L' 5.782 AC. PRESERVATION PARCEL 'L' OWNED AND MAINTAINED BY HOMEOWNER'S ASSOCIATION

24' WIDE PRIVATE USE-IN-COMMON DRIVEWAY ACCESS EASEMENT ACROSS LOTS 97, 98 AND 99 AND PRESERVATION PARCEL 'M' FOR THE USE AND BENEFIT OF LOTS 96, 97, 98 AND 99. MAINTENANCE AGREEMENT RECORDED AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND.


25' WETLAND BUFFER

24' WIDE PRIVATE DRIVEWAY ACCESS EASEMENT ACROSS FOR THE USE AND BENEFIT MAINTENANCE AGREEMENT RECORDED AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND.

EXISTING AND EQUIPMENT ALONG AT THE RESIDUAL BE PERMITTED TO REMAIN WILL THIS

NON-BUILDING PARCEL CONVEYED TO OWNER OF WEST FRIENCE PLAT No. 9936 OF THE

Approved F-95-183

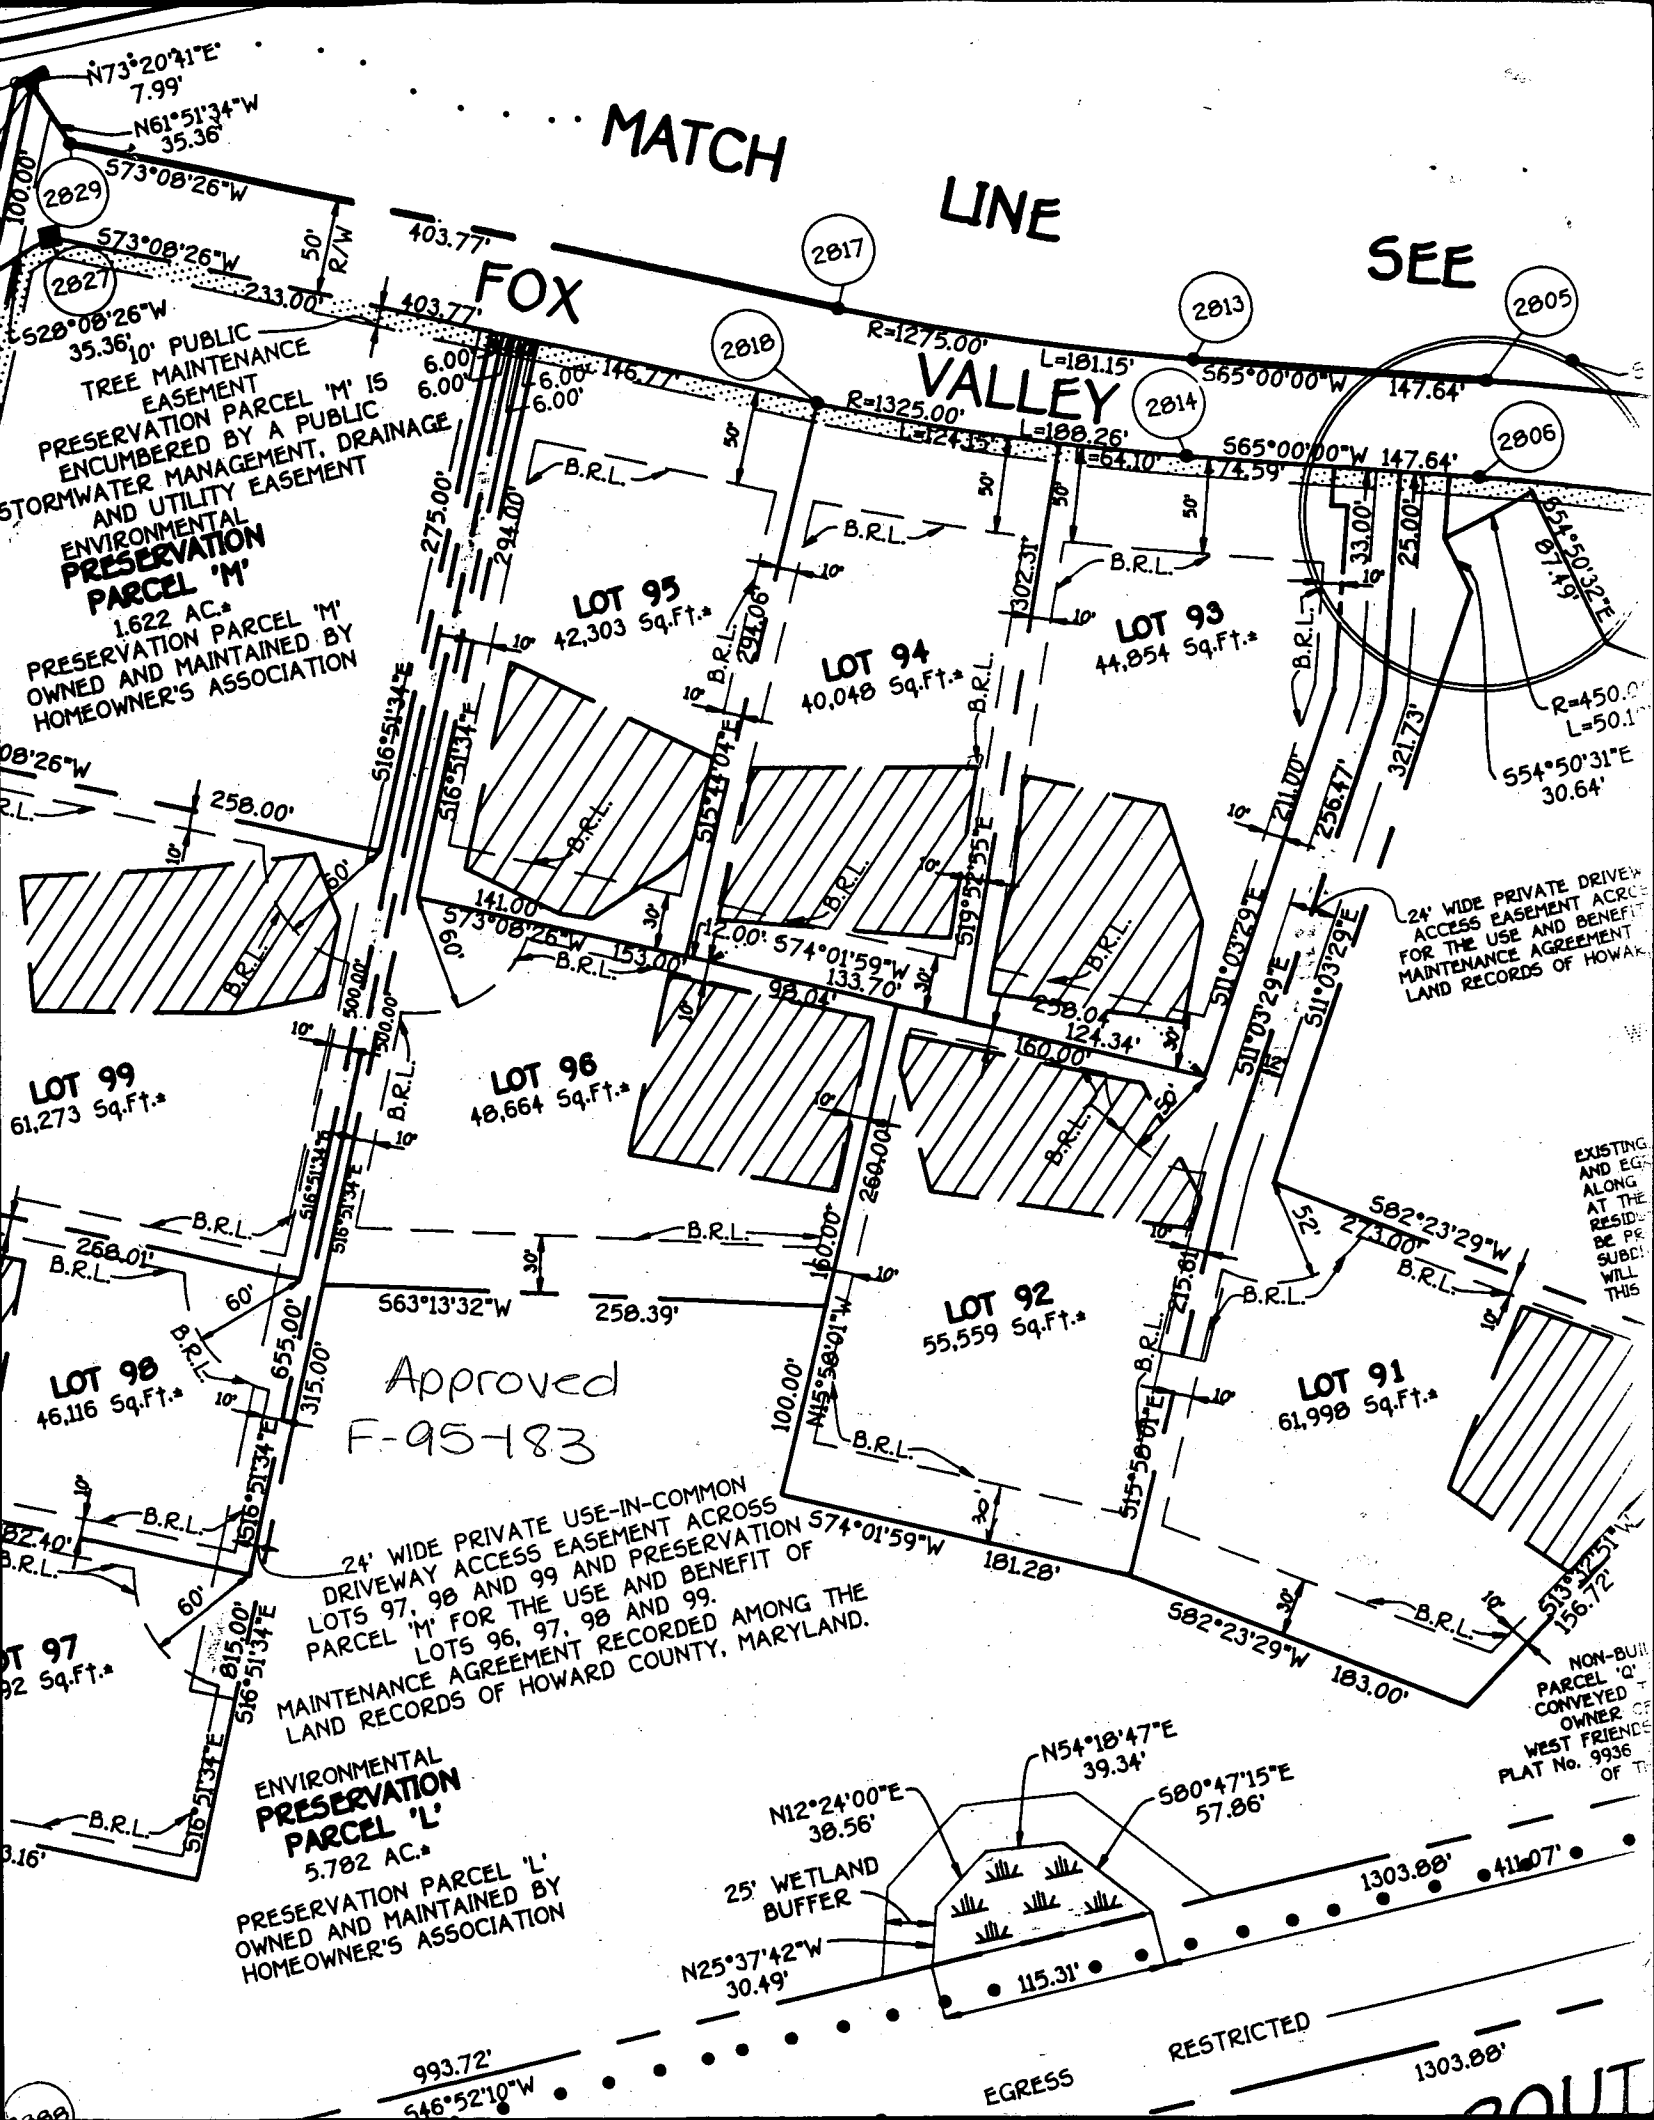

EGRESS RESTRICTED

ROUTE

C1 9667

SEQUENCE NO. (MDE USE ONLY)

STATE OF MARYLAND WELL COMPLETION REPORT

THIS REPORT MUST BE SUBMITTED AFTER WELL IS COMPLETED.

COUNTY NUMBER A48734

ST/CO USE ONLY DATE Received

DATE WELL COMPLETED MM DD YY 04 20 99

Depth of Well 22 200 26 (TO NEAREST FOOT)

PERMIT NO. FROM "PERMIT TO DRILL WELL" NO. 94-2210

OWNER Altieri Homes last name Fox Valley DR first name TOWN West Friendship SUBDIVISION West Friendship Est SECTION II LOT 94

WELL LOG Not required for driven wells

STATE THE KIND OF FORMATIONS PENETRATED, THEIR COLOR, DEPTH, THICKNESS AND IF WATER BEARING

Table with columns: DESCRIPTION, FEET (FROM, TO), check if water bearing. Rows include Overburden, Soft Shale, Gray Rock, and water at 160'.

GROUTING RECORD

WELL HAS BEEN GROUTED (Y) (N) TYPE OF GROUTING MATERIAL (C) (M) (B) (C) NO. OF BAGS 21 NO. OF POUNDS 2108

CASING RECORD

MAIN CASING TYPE (S) (T) (L) (P) Nominal diameter top (main) casing (nearest inch)! Total depth of main casing (nearest foot) 6 88

OTHER CASING (if used)

SCREEN RECORD

DEPTH (nearest ft.)

Table with columns: E, A, C, H, S, R, E, N. Rows include casing height and screen diameter information.

GRAVEL PACK IF WELL DRILLED WAS FLOWING WELL INSERT F IN BOX 68


MDE USE ONLY (NOT TO BE FILLED IN BY DRILLER) T (E.R.O.S.) W Q

PUMPING TEST

HOURS PUMPED (nearest hour) 3 PUMPING RATE (gal. per min.) 13.6 METHOD USED TO MEASURE PUMPING RATE Submersible

PUMP INSTALLED

DRILLER INSTALLED PUMP (YES) (NO) TYPE OF PUMP INSTALLED (A) (C) (J) (P) (R) (S) (T) (O) CAPACITY: GALLONS PER MINUTE (to nearest gallon) 31 35

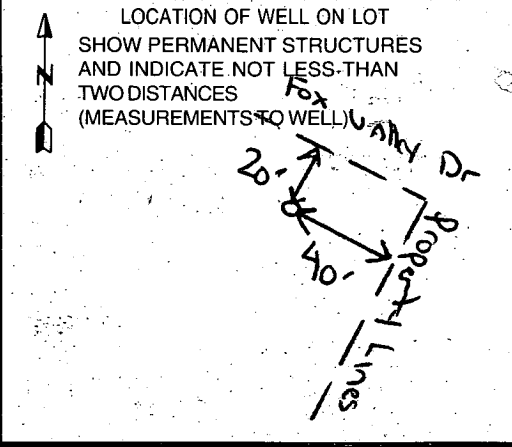

NUMBER OF UNSUCCESSFUL WELLS: 0 WELL HYDROFRACTURED (Y) (N)

- A A WELL WAS ABANDONED AND SEALED WHEN THIS WELL WAS COMPLETED E ELECTRIC LOG OBTAINED P TEST WELL CONVERTED TO PRODUCTION WELL

I HEREBY CERTIFY THAT THIS WELL HAS BEEN CONSTRUCTED IN ACCORDANCE WITH COMAR 26.04.04 "WELL CONSTRUCTION" AND IN CONFORMANCE WITH ALL CONDITIONS STATED IN THE ABOVE CAPTIONED PERMIT, AND THAT THE INFORMATION PRESENTED HEREIN IS ACCURATE AND COMPLETE TO THE BEST OF MY KNOWLEDGE.

DRILLERS LIC. NO. MWD 399 DRILLERS SIGNATURE (MUST MATCH SIGNATURE ON APPLICATION) LIC. NO. 2441

SITE SUPERVISOR (sign. of driller or journeyman responsible for sitework if different from permittee)

B 1	0660	SEQUENCE NO. (MDE USE ONLY)	STATE OF MARYLAND PERMIT TO DRILL WELL please print or type	STATE PERMIT NUMBER HO - 94 - 2210 <small>70 fill-in this form completely 79</small>
-----	-------------	--------------------------------	--	---

OWNER INFORMATION

Date Received (APA) **02 26 99**
8 MM DD YY 13

Alter: Homes
15 Last Name Owner First Name 34

9017 Red Branch Road
36 Street or RFD 55

Columbia MD 21045
57 Town 70 State 72 Zip 76

LOCATION OF WELL

Howard
8 COUNTY 21

~~Fox Valley~~ **w. Friendship Estates**
23 SUBDIVISION

94
SECTION 44 46 LOT 48 50

Colony
52 NEAREST TOWN 71

MILES FROM TOWN (enter 0 if in town) **1**
73 M 76 77 78

DRILLER INFORMATION

Paul M. Fabiszak M.W D3 9 9
76 License No. 81

G. Edgar Harr Sons' Corp
Firm Name

12047 Falls Rd. Cockeysville 21030
Address

Paul M. Fabiszak
Signature Date

3314 Fox Valley Drive
11 NEAR WHAT ROAD 30

ON WHICH SIDE OF ROAD (CIRCLE APPROPRIATE BOX)
34 37

NORTH
 WEST
 SOUTH
 EAST

DISTANCE FROM ROAD
ENTER FT OR MI 38 39

TAX MAP: _____ BLK: _____ PARCEL: _____

WELL INFORMATION

5
APPROX. PUMPING RATE (GAL. PER MIN.)

750
AVERAGE DAILY QUANTITY NEEDED (GAL. PER DAY) 14 20

NOT TO BE FILLED IN BY DRILLER HEALTH DEPARTMENT APPROVAL

Howard Co A48734
COUNTY NAME COUNTY NO.

STATE SIGNATURE _____ INSERT S →
DATE ISSUED 03/29/99

03/29/99
43 MM DD YY 48

CO SIGNATURE _____ EXP. DATE
NORTH GRID 520 000 EAST GRID 800 000

50 55 57 63

USE FOR WATER (CIRCLE APPROPRIATE BOX)

DOMESTIC POTABLE SUPPLY & RESIDENTIAL IRRIGATION

FARMING (LIVESTOCK WATERING & AGRICULTURAL IRRIGATION)

INDUSTRIAL, COMMERCIAL, DEWATERING

PUBLIC WATER SUPPLY WELL

TEST OBSERVATION MONITORING

GEO-THERMAL

APPROXIMATE DEPTH OF WELL **250** FEET
24 28

APPROXIMATE DIAMETER OF WELL _____ INCH
NEAREST

METHOD OF DRILLING (circle one)

BORED (or Augered) JETTED Jetted & DRIVEN

AIR-ROTARY AIR-PERCUSSION ROTARY (Hydraulic Rotary)

CABLE REVERSE-ROTARY DRIVE-POINT

other _____

REPLACEMENT OR DEEPEMED WELLS (CIRCLE APPROPRIATE BOX)

THIS WELL WILL NOT REPLACE AN EXISTING WELL

THIS WELL WILL REPLACE A WELL THAT WILL BE ABANDONED AND SEALED

THIS WELL WILL REPLACE A WELL THAT WILL BE USED AS A STANDBY CONTACT LOCAL APPROVING AUTHORITY FOR POLICY ON STANDBY WELLS

THIS WELL WILL DEEPEAN AN EXISTING WELL

PERMIT NUMBER OF WELL TO BE REPLACED OR DEEPEMED (IF AVAILABLE) _____

Not to be filled in by driller (MDE OR COUNTY USE ONLY)

APPROP. PERMIT NUMBER _____ G A P _____

PERMIT No **HO 94 2210**
70 71 72 73 74 75 76 77 78 79

SHOW MAJOR FEATURES OF BOX & LOCATE WELL WITH AN X

SOURCES OF DRILLING WATER
 1. well
 2.
 3.

WRITE THE BOX NUMBER FROM THE MAP HERE

E **800**
 N **520**

4/15/99
 Grout complete 4/23/99
 S.R.K. (CW)
 Not called in for inspection S.R.K.

4/30/99 DRILLER ACKNOWLEDGES

DRAW A SKETCH BELOW SHOWING LOCATION OF WELL IN RELATION TO NEARBY TOWNS AND ROADS AND GIVE DISTANCE FROM WELL TO NEAREST ROAD JUNCTION

INSR REQUEST MAY HAVE BEEN MISSED MR

REFERENCE TO FOX VALLEY SYkesville RD

SPECIAL CONDITIONS
 NOTE - APPROVING AUTHORITIES SHOULD USE SEPARATE SHEET IF NEEDED

3/26/99
MATCH of as
shown on
plan

EXISTING 20' WIDE BALTIMORE
GAS AND ELECTRIC COMPANY
EASEMENT AND RIGHT-OF-WAY
LIBER 1034, FOLIO 665

10' PUBLIC
TREE MAINTENANCE
EASEMENT
PRESERVATION PARCEL 'M' IS
ENCUMBERED BY A PUBLIC
STORMWATER MANAGEMENT DRAINAGE
AND UTILITY EASEMENT
**ENVIRONMENTAL
PRESERVATION
PARCEL 'M'**
1.622 AC.
PRESERVATION PARCEL 'M'
OWNED AND MAINTAINED BY
HOMEOWNER'S ASSOCIATION

10' PUBLIC
TREE MAINTENANCE
EASEMENT

SOLD

VALLE

LOT 99

LOT 96

LOT 94

SOLD

SOLD

LOT 92

LOT 97

24' WIDE PRIVATE DRIVEWAY ACCESS EASEMENT ACROSS
LOTS 97, 98 AND 99 AND PRESERVATION PARCEL 'M'
FOR THE USE AND BENEFIT OF
LOTS 96, 97, 98 AND 99.
MAINTENANCE AGREEMENT RECORDED AMONG THE
LAND RECORDS OF HOWARD COUNTY, MARYLAND.

**ENVIRONMENTAL
PRESERVATION
PARCEL 'L'**
5.702 AC.

FOREST
CONSERVATION
EASEMENT

MITIGATION AREA 1.509
Ac. REPLANTED TO
SATISFY OBLIGATIONS
FOR F 90-04, L 3795
P. 54

PRESERVATION PARCEL 'L'
OWNED AND MAINTAINED BY
HOMEOWNER'S ASSOCIATION

MITIGATION AREA 1.807 Ac. REPLANTED

25' WETLAND

